


Back-upprocedure



I & A
SAMENWERKING

Back-upoplossing

De back-up is een 2-stage oplossing. Deze bestaat uit twee media agents met lokale disklibrary's in DC1, een derde media agent en een tapelibrary in DC2.

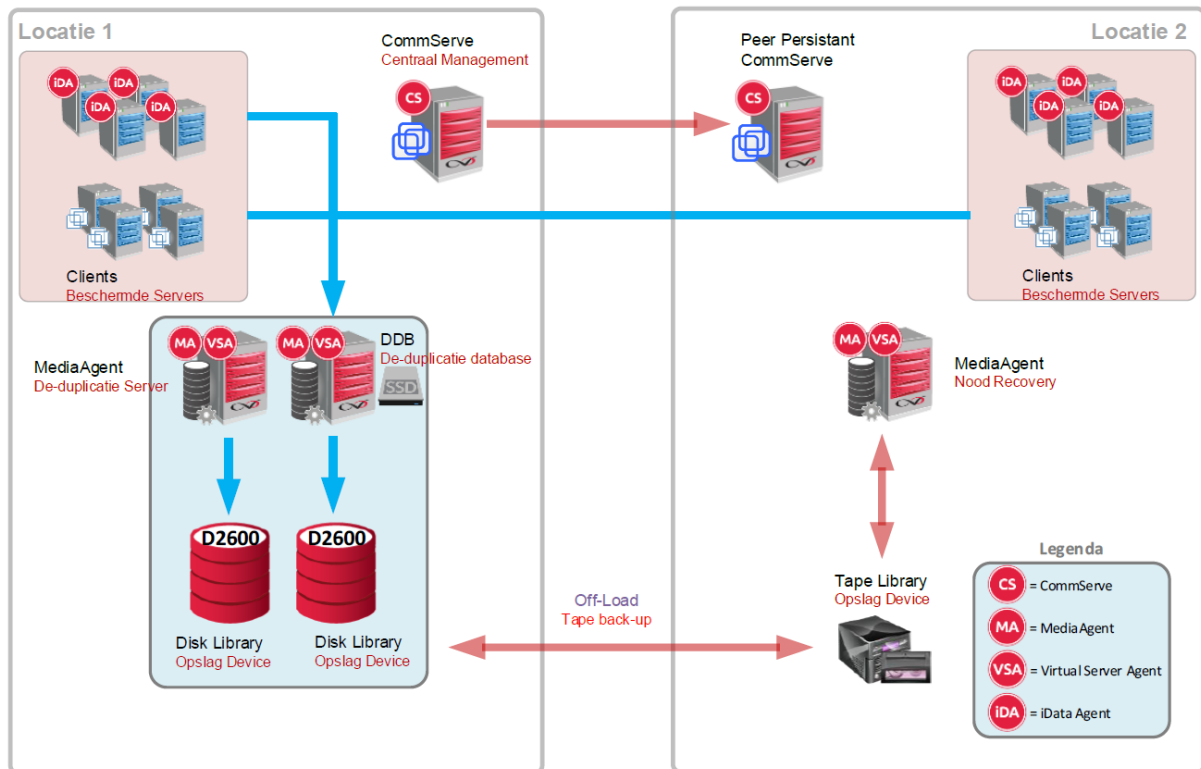

Zoals aangegeven, vindt de primaire back-up plaats in DC1. De twee MediaAgents met een lokale disklibrary maken incrementals naar disk. Deze wordt na afloop gekopieerd naar tape (DC2). Na de vrijdag-back-up wordt een Synthetic Full Backup gegenereerd en naar tape geschreven. Elke eerste vrijdag van de maand wordt een maand-back-up gegenereerd.

Back-upfrequentie

- Incrementals één (1) keer per dag
- Synthetic Fulls één (1) keer per week
- Maand-back-ups één (1) keer per maand

Bewaarbeleid back-up

- Incrementals: Vier (4) weken beschikbaar;
- Synthetic Fulls: Vier (4) weken beschikbaar;
- Maand back-ups: Één (1) jaar beschikbaar.

Actuele omvang back-up

Doorvoer incremental

Entity	Date
	06/27/2019 10:10:23
Configuration	
Number of clients	45
Number of Agents	28
Number of MediaAgents	3
Changes to Agents	80
Job Statistics	
Total Data Size Backed Up in Last 24 Hours	3.56 TB
Incremental Data Protection Jobs in Last 24 Hours	130
Incremental Data Size Backed Up in Last 24 Hours	800.42 GB
Last Weekend Data Protection Jobs	74
Last Weekend Data Size Backed Up	22.88 TB
Data Protection and Collection Jobs in Last 7 Days	1,264
Data Size Backed Up in Last 7 Days	78.08 TB
Total Data Protection and Collection Jobs in Last 24 Hours	225
Jobs in Queue(Queued) in Last 24 Hours	0
Jobs in Queue(Pending) in Last 24 Hours	0
Jobs in Queue(Waiting) in Last 24 Hours	0
Jobs in Queue(Suspended) in Last 24 Hours	0
Jobs in Queue(Running) in Last 24 Hours	3
Media Management Statistics	
Number of Mounts in Last 24 Hours	0
Chunks Closed in Last 24 Hours	1,480
Number of Reservations in Last 24 Hours	724