

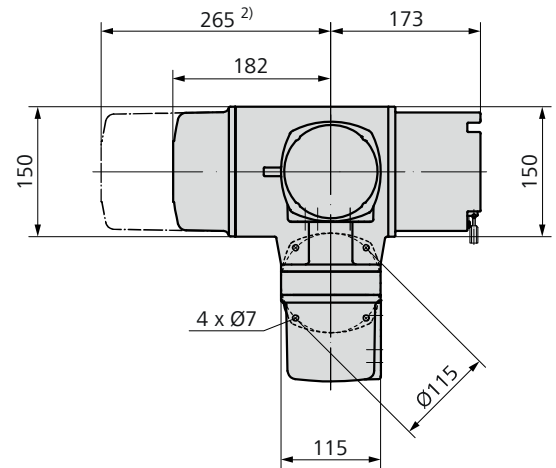



Dimensions AC 01.2 wall bracket

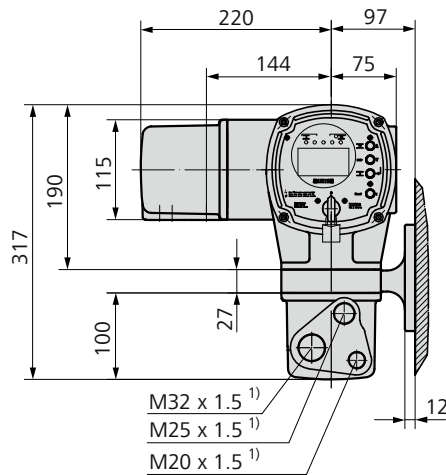


Version with f eldbus

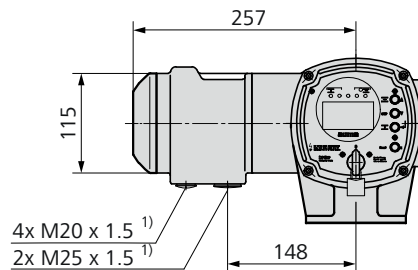


Version with thermal overload relay



Version with f eldbus FOC

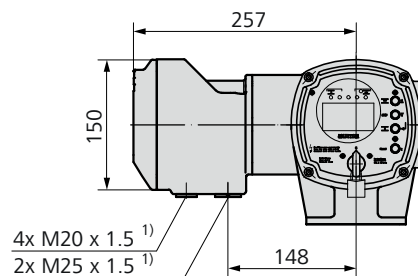

Version with Modbus TCP/IP

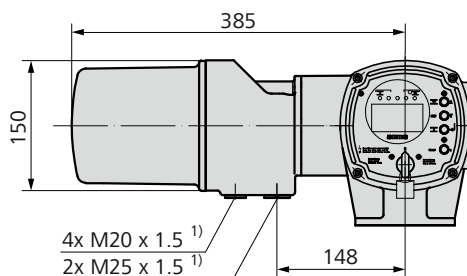

1) Thread for steel conduit subject to explicit order.

2) High housing cover only in combination with the options:

- Switch gear A3
- Low temperature version with heating system
- DC versions 24 V DC to 220 V DC
- Mains voltage tolerance -30 %
- Auxiliary voltage output 115 V AC

We reserve the right to alter data according to improvements made. Previous documents become invalid with the issue of this document.