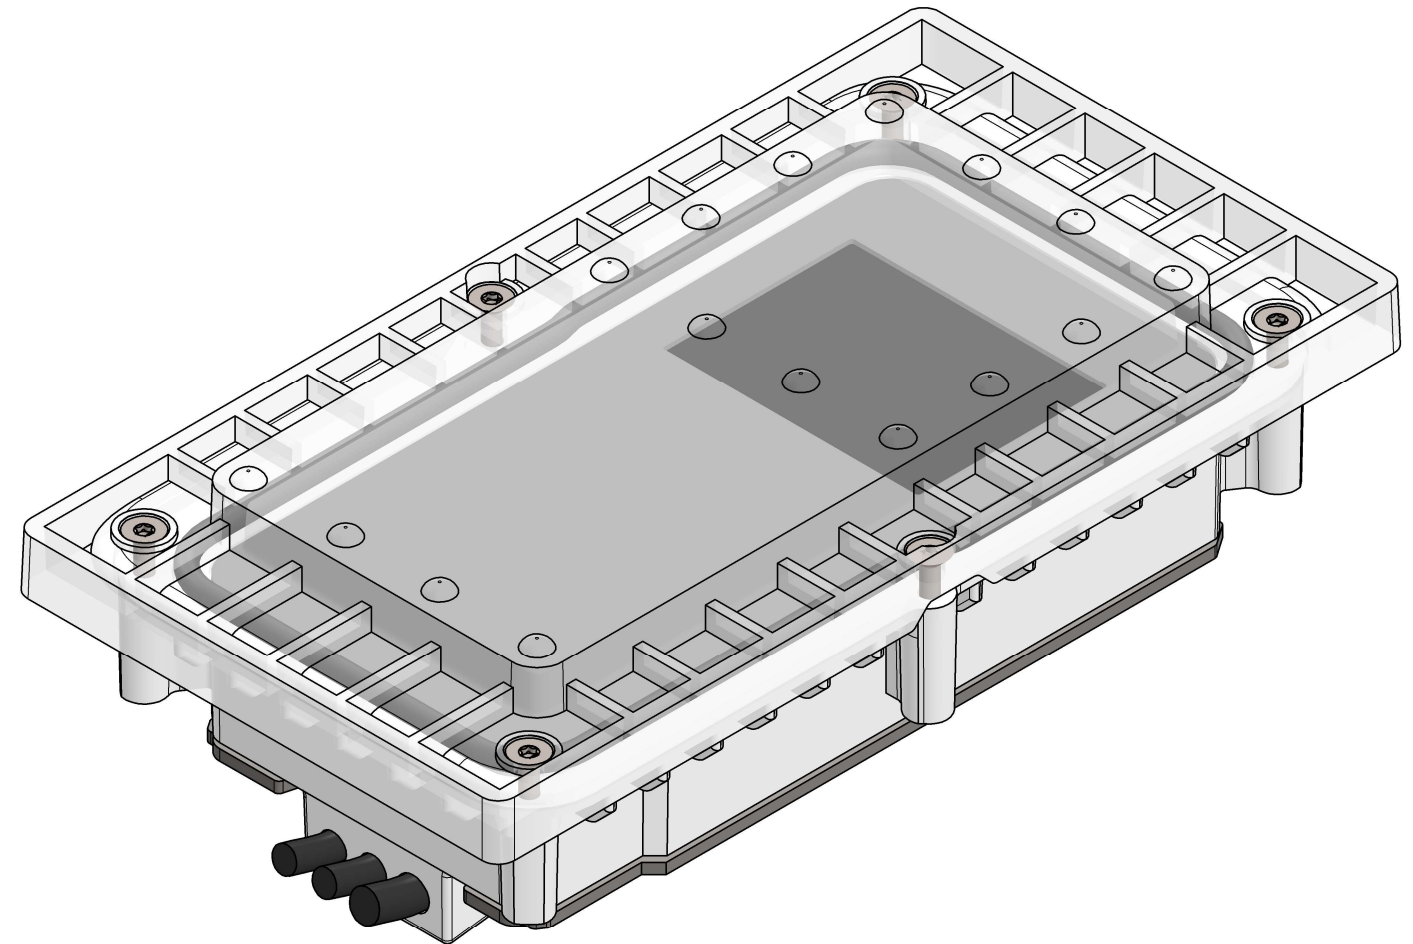
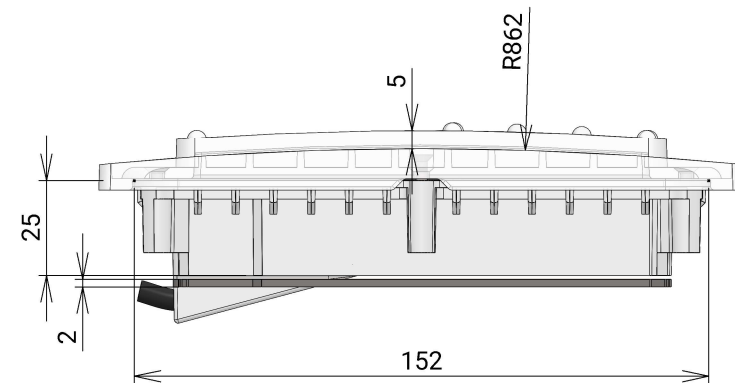
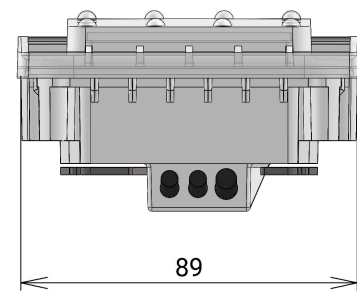


|                                              |           |          |            |             |              |               |               |                           |           |            |             |                                                                                                                                                                                     |                                                                                                                                         |                |            |                                    |                   |  |       |  |
|----------------------------------------------|-----------|----------|------------|-------------|--------------|---------------|---------------|---------------------------|-----------|------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|------------------------------------|-------------------|--|-------|--|
| Toleranties volgens NEN-ISO 2768-k klasse: m | Lengte    |          |            |             |              |               |               | Hoek (kortste beenlengte) |           |            |             |                                                                                                                                                                                     | <div>A3</div> <div></div> <div>NEN-ISO 129-1</div> | Materiaal:     |            | R: , V: , d: "Thickness@part.SLDP" |                   |  |       |  |
|                                              | 0,5 t/m 6 | 6 t/m 30 | 30 t/m 120 | 120 t/m 400 | 400 t/m 1000 | 1000 t/m 2000 | 2000 t/m 4000 | 0 t/m 10                  | 10 t/m 50 | 50 t/m 120 | 120 t/m 400 | vanaf 400                                                                                                                                                                           |                                                                                                                                         | Nabehandeling: |            | Lasproces: -                       |                   |  |       |  |
|                                              |           |          |            |             |              |               |               |                           |           |            |             |                                                                                                                                                                                     |                                                                                                                                         | Type tek.:     |            | Blad: 2/3                          |                   |  |       |  |
|                                              | ±0,10     | ±0,20    | ±0,30      | ±0,50       | ±0,80        | ±1,20         | ±2,0          | ±1 *                      | ±0,5*     | ±0,33*     | ±0,17*      | ±0,08*                                                                                                                                                                              |                                                                                                                                         | Getekend:      |            | Schaal: 1:2                        |                   |  |       |  |
| Opmerking:                                   |           |          |            |             |              |               |               |                           | Status:   |            |             | Vrijgegeven:                                                                                                                                                                        |                                                                                                                                         |                | Gew. (kg): |                                    |                   |  |       |  |
|                                              |           |          |            |             |              |               |               |                           |           |            |             | Gewijzigd:                                                                                                                                                                          |                                                                                                                                         |                | Art.code:  |                                    |                   |  |       |  |
| Benaming:                                    |           |          |            |             |              |               |               |                           |           |            |             | <div> vconsyst</div> <div>Vconsyst Participaties BV www.vconsyst.com +31 (0)38 38 570 57</div> |                                                                                                                                         |                |            |                                    | Tek.nr.: 00060171 |  | Rev.: |  |

© Vconsyst Participaties BV - The reproduction, distribution and utilization of this document, as well as the communication of its contents to others without express authorization, is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.