
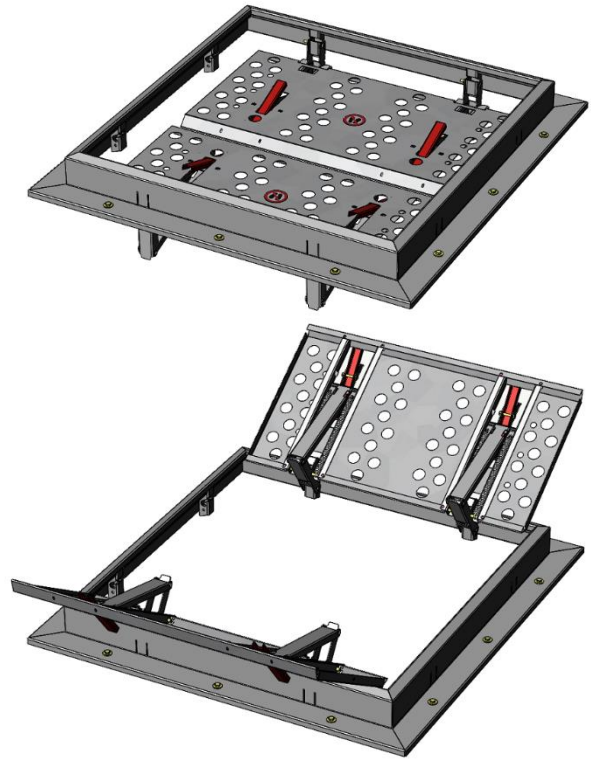


# VSF1465

## VConsyst Safety Floor

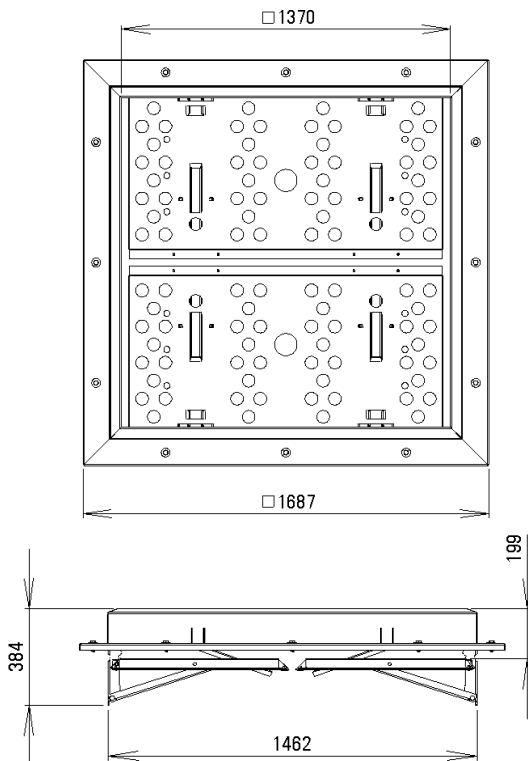

### General specifications

|               |                                         |
|---------------|-----------------------------------------|
| <b>Model</b>  | : VSF1465                               |
| Product type  | : Saloon door safety system             |
| Adjustable    | : No, only with optional additional rim |
| Miscellaneous | : Fasteners and compriband included     |

|                   |                             |
|-------------------|-----------------------------|
| <b>Material</b>   |                             |
| Welded parts      | : 3 mm S235JR, fully welded |
| Saloon doors      | : 2 mm Sendzimir            |
| Closing mechanism | : 8 springs                 |

|                     |                                                                  |
|---------------------|------------------------------------------------------------------|
| <b>Preservation</b> |                                                                  |
| Galvanisation       | : Welded parts are hot dip galvanized<br>acc. to DIN-EN-ISO 1461 |

### Quality and environment

System compliant with NEN-EN 13071-2  
 Product with TÜV type approval  
 All our underground containers can be returned for recycling

### Options

|              |                     |
|--------------|---------------------|
| <b>Sizes</b> | <b>Total weight</b> |
| 1687x1687mm  | 115 kg              |

### Features

Doors can be reoriented 90 degrees after installation  
 Doors can be (re)placed without using tools  
 Doors can be fixed 145 degrees up for service  
 Adjustment rim can be added afterwards if necessary

### Can be combined with

Metro® concrete box  
 Metro® size container  
 Tearplate 1450x1450mm  
 Adjustment rim