


LED: Luminous flux maintenance
80%: 50.000h (L80B20).
Power factor >0.95

* 22152960-00: class I (h=162mm)

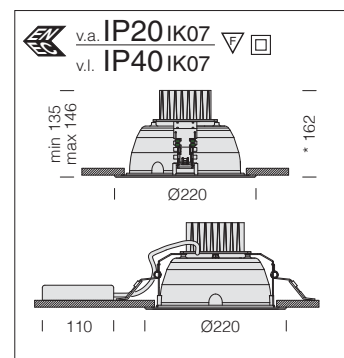

Reflector: V2 self-extinguishing polycarbonate; matt aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Office 1 - MATT						
LED	colour	CLD CELL (ON-OFF)	CLD CELL-E	CLD CELLD-DIG (DALI)	W tot	LUMEN OUTPUT (tq= 25 °C)
		code	code	code		K - ølm - CRI
COB	matt	22152415-00	22152415-09	22152415-1241	20	3000K - 2197lm - CRI 92
		22152414-00	22152414-09	22152414-1241		4000K - 2488lm - CRI 92
COB		22152413-00	22152413-09	22152413-1241	27	3000K - 3084lm - CRI 92
				22152410-1241		4000K - 3172lm - CRI 92
COB		22152412-00	22152412-09	22152412-1241	35	3500K - 3248lm - CRI 92
LED 3000		22152961-00	22152961-09	22152961-1241	32	3000K - 3251lm - CRI 92
SLM 4500		22152416-00	22152416-09	22152416-1241	40	3000K - 4674lm - CRI 92
				22152417-1241		4000K - 4804lm - CRI 92
COB		22152411-00	22152411-09	22152411-1241	39	3000K - 3954lm - CRI 92
COB *		22152960-00	22152960-09	22152960-1241	69	4000K - 6734lm - CRI 92