

CityCat 5006: performance package in the compact class

The CityCat 5006 compact street sweeper sets a new standard for compact sweepers with its unique design and pioneering technology. Power is supplied by a potent 118kilowatt diesel engine with AdBlue additive and an exhaust after-treatment system which allows the CityCat 5006 to meet the strict Euro 6 emis-sions standard.

The whole package sets standards for performance and range with its high suc-tion power, large hopper and a huge water storage capacity.

The machine provides staff with a high degree of driving and operating comfort. The spacious cabin, optionally available with three seats, has large windows to provide a clear view forward and of the side brushes.

The compact outer dimensions, as well as the four-wheel steering that can be turned on and off, give the vehicle maximum manoeuvrability and ensure perfect directional stability and safety for everyday work.

Whether on the motorway, main roads or side streets, in city centres, Pedestrian zones, at bus stops, in narrow passageways or rest areas: the CityCat 5006 can be used in a huge variety of places.



Outstanding sweeper performance The CityCat 5006 sweeper combines high suction performance and range with environmentally friendly operation. The superior performance and range of this compact unit from Bucher Municipal sets the standard for the 5 m³ class.



Effective winter service The CityCat 5006 is suitable for both effective snow clearance and a balanced approach to dealing with icy and snow-covered roads. It efficiently clears commercial and shipment areas, paths and streets as well as access routes and car parks.



Speed 80 km/h The 5 m³ compact CityCat 5006 street sweeper is also available in an 80 km/h variant. This allows it to travel and sweep on motorways and other fast stretches of road.

CityCat 5006 technical data

Dimensions	
Length	4945 mm
Width	1798 mm
Height	2500 mm
Wheelbase	2450 mm
Track	1513 mm
Max. sweeping width	
2 brushes	2533 mm
3 brushes	3520 mm
3 brushes road construction	3768 mm
Turning radius	2900 mm


Chassis	
Ladder frame chassis with a C-profile structure from Bucher Municipal	
Kerb weight	5500 kg
Payload	5000 kg
GVW	10500 kg

Hopper	
Hopper volume	5.6 m³
Discharge height	930 mm
Discharge height (high-dump version)	1550 mm
Discharge width	1700 mm
Discharge angle	51°

Performance	
Working speed	0–20 km/h
Travelling speed	0–80 km/h
Gradeability up to	30%

Engine	
FPT, Iveco Euro 6	NEF 45 ENT 6
FPT, Iveco Stage IIIA/Tier 3	NEF 45 ENT
Displacement	4485 cm³
Power	118 kW/104 kW
Torque	580 Nm/560 Nm
Fuel tank	110 l
AdBlue tank (Euro 6 only)	30 l
Electrical system	24 V

Tyres	265/70 R 19.5 140/138M
Cabin noise level	63 dB(A)

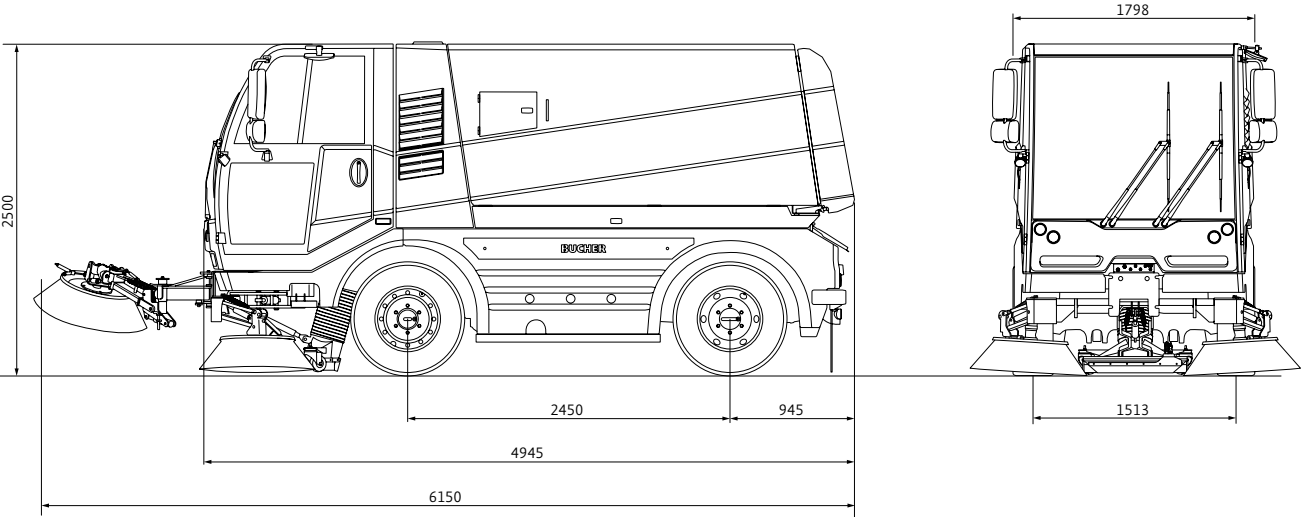

CityCat 5006 technical description

Steering Hydrostatic-controlled four-wheel steering with hydraulic servo support, 80 km/h mechanical variant.

Axles Drive axle at the rear with differ-ential and planetary hub reduction. Running axle at the front.

Brakes Hydraulic, dual-circuit high-performance brake system with double callipers on each side on front axis and single calliper on rear axis. Manually operated parking brake, acting hydrau-lically on additional brake disc in front of differential.

Driver's cab Comfortable, hydro bear-ing suspension, soundproofed cab. Windscreen made of heat-insulating, curved, low-reflection safety glass. Two sliding windows in each door. Multi-speed heating fan. Sun visor. Windscreen wiper/washer system. Air-sprung driver's seat and sprung passenger's seat, each individually adjustable. Steering column can be adjusted in both angle and height. Clearly and ergonomically ar-ranged operating and monitoring instru-ments with a 7-inch colour display. Visual and acoustic alarm for tempera-ture and liquid level monitoring. Visual diagnostic system with intuitive design.

Sweeping system Pick-up principle based on suction, with retracted, rust-proof suction nozzle in front of axis, can be hydraulically moved 400 mm laterally with the side brush. Hydraulic suction nozzle height adjustment. Stepless adjustable high-power suction fan.

Water system Water capacity approx. 880 l Two water pumps for the water nozzles.

Brushes Two side brushes left and right Ø 900 mm Variable speed adjustment 0–150 rpm Impact-proof brush suspension-impact protection.

A third brush for a maximum cleaning width of 3768 mm and for sweeping corners and ramps; can be used left, right, centred and on a second raised level. Variable speed adjustment 0–150 rpm

- Options**
- Driving speed 80 km/h
 - Road construction brush
 - Additional water tank 1120 l (total 2000 l)
 - Boom with reel and hand lance
 - Air conditioning
 - High dump
 - Water recirculation system
 - Wander hose
 - Weed brush
 - Hydraulic tilt of the side brushes
 - High-pressure water system
 - EasyClean system
 - Hydraulic mesh lifting system
 - Leaf grid lifter
 - LED working lights
 - Rear-view and suction nozzle camera
 - Data capture
 - A variety of winter maintenance options

A wide range of further options are available – please contact us for more information.

Technical data are subject to change without prior notice.



Boom with reel and hand lance Two booms are mounted on the hopper with a reel and a hand lance that are connected to the high-pressure water system of the CityCat 5006. These are useful for flushing rubbish from the sides of the street directly in front of the sweeper to significantly increase the working width and efficiency.



Additional 1120-litre water tank The addi-tional 1120-litre water tank increases the total capacity to 2000-litres, thus maximising operating time. This enables simultaneous washing and sweeping.



Road construction brush The robust brush is particularly suited for heavy use on road construction sites and weed removal applica-tions. It provides a large working area and even better coverage in curves. Furthermore, it has a ground pressure control and a bidirec-tional tilt adjustment.

CityCat 5006: the economical year-round machine

The CityCat 5006 can be converted from sweeping to winter operation in record time. Straight from the factory, the CityCat 5006 comes ready for winter service: for example, the flexible subframe under the hopper allows retrofitting the CityCat 5006 for (grit and de-icer) spreading duties. A well-thought-out clutch system allows all hydraulic and electric cabling to be decoupled in no time at all, so the driver can modify the sweeper for winter conditions, unassisted, in only 30 minutes. In this configuration, the sweep gear and suction nozzle simply remain on the sweeper.

For snow-clearing service and de-icing, the Bucher Municipal CityCat 5006 features a snow plough, which is mounted on the same mounting plate as the front brush and controlled by the front brush joystick. Also available: a spreader (1.8 m³) that can handle wet salt. Drivers and fleet managers can review cleaning and spreading hours, or even transfer these onto a USB stick and analyse the data at a PC.

The innovative features of the CityCat 5006 make it an economical year-round machine.

Bucher Municipal AG
Murzlenstrasse 80
CH-8166 Niederweningen
Tel. +41 44 857 22 11
Fax +41 44 857 24 10
sweepers@buchermunicipal.com
www.buchermunicipal.com/sweepers

Bucher Municipal GmbH
Schörflingstrasse 3
DE-30453 Hanover
Tel. +49 511 214 90
Fax +49 511 214 9 - 115
sweepers.de@buchermunicipal.com
www.buchermunicipal.com/sweepers

Bucher Municipal Ltd.
258 Seohaean-ro
Siheung-si, Gyeonggi-do
Korea (15086)
Tel. +82 31 498 89 61-3
Fax +82 31 498 89 85
info@buchermunicipal.co.kr
www.buchermunicipal.co.kr

www.buchermunicipal.com/sweepers

01_05/2017



BUCHER
municipal

Performance package in the compact class



Your Bucher Municipal contractual partner:



Innovation • Competency • Reliability • Sustainability

CityCat 5006