

Deflection Data Report

N321_0HRM_RL_11150_f25

Geophone distances (mm):			0	200	300	450	600	900	1200	1500	1800
Chainage	Drop	Stress kPa	D1 Mic.	D2 Mic.	D3 Mic.	D4 Mic.	D5 Mic.	D6 Mic.	D7 Mic.	D8 Mic.	D9 Mic.
11.150t	4	1050	149	144	138	132	126	112	100	86	75
11.100t	4	1050	163	155	151	143	135	117	103	87	74
11.050t	4	1048	244	228	222	208	195	168	145	113	93
11.024t	4	1052	154	148	145	138	132	119	107	93	81
10.974t	4	1049	180	168	161	150	141	123	106	89	77
10.929t	4	1048	203	195	191	182	173	153	133	110	91
10.874t	4	1049	183	175	169	160	151	133	117	99	83
10.829t	4	1047	156	147	140	133	125	109	95	81	68
10.774t	4	1051	144	138	136	129	124	110	98	85	74
10.724t	4	1046	186	180	177	170	161	144	126	107	90
10.678t	4	1047	180	173	168	160	152	134	118	100	85
10.625t	4	1057	131	123	121	116	110	98	86	73	63
10.572t	4	1047	103	97	95	90	87	76	70	61	54
10.552t	4	701	82	81	79	76	74	69	64	57	50
10.525t	4	700	110	105	103	100	96	88	78	69	60
10.500t	4	704	94	92	90	85	80	70	60	51	42
10.474t	4	706	86	81	80	76	71	65	55	46	40
10.450t	4	703	102	89	84	80	75	66	56	47	41
10.426t	4	707	115	108	104	97	90	76	62	51	43
10.400t	4	707	125	123	117	109	100	83	71	57	48
10.370t	4	699	171	154	153	141	130	105	81	59	40
10.350t	4	703	122	109	104	96	89	76	65	54	46
10.325t	4	703	113	105	102	96	90	77	66	54	46
10.298t	4	702	140	135	134	130	126	115	101	87	74
10.276t	4	696	132	126	124	120	114	98	83	68	57
10.248t	4	704	120	117	118	115	113	109	98	89	78
10.225t	4	705	115	103	98	90	83	72	61	52	44
10.200t	4	699	111	95	93	87	80	67	59	47	39
10.175t	4	708	130	116	115	107	100	84	71	58	48
10.150t	4	704	101	89	89	83	78	68	60	50	44
10.124t	4	699	102	90	85	79	74	64	55	46	39
10.100t	4	703	127	113	108	100	94	81	67	55	48
10.073t	4	696	167	155	153	146	140	124	107	88	72
10.051t	4	708	97	89	87	82	78	69	57	47	41
10.021t	4	707	115	107	103	98	92	77	66	53	42
9.998t	4	703	121	117	116	114	112	104	94	83	73
9.974t	4	703	106	98	96	92	88	77	68	59	51
9.951t	4	706	110	105	98	92	85	71	58	48	40
9.925t	4	702	106	97	97	91	87	76	64	54	47
9.900t	4	704	121	115	111	106	99	86	72	61	52
9.872t	4	705	120	113	108	105	100	90	78	67	57
9.849t	4	698	106	101	99	96	92	83	75	65	58
9.825t	4	703	113	102	98	93	86	74	65	54	46
9.800t	4	705	102	95	90	86	81	69	60	50	43
9.772t	4	698	121	113	111	106	101	89	76	63	52
9.751t	4	697	122	112	108	101	95	80	68	56	47
9.725t	4	705	105	98	95	91	86	76	66	57	49
9.701t	4	696	144	130	126	119	111	96	83	69	58
9.674t	4	706	118	108	107	103	98	88	79	69	59
9.650t	4	694	116	109	102	96	90	78	66	56	47

Geophone distances (mm):			0	200	300	450	600	900	1200	1500	1800
Chainage	Drop	Stress kPa	D1 Mic.	D2 Mic.	D3 Mic.	D4 Mic.	D5 Mic.	D6 Mic.	D7 Mic.	D8 Mic.	D9 Mic.
9.625t	4	697	113	104	102	97	92	81	70	60	52
9.600t	4	696	112	96	93	88	82	70	61	50	43
9.573t	4	694	107	103	101	98	95	85	75	65	55
9.549t	4	693	115	111	110	107	104	94	84	73	63
9.525t	4	701	93	88	86	83	80	71	64	55	47
9.499t	4	697	102	98	96	93	89	81	73	64	56
9.470t	4	699	90	86	83	79	75	63	52	43	37
9.450t	4	702	99	94	90	85	81	72	62	50	46
9.424t	4	697	92	89	86	81	77	66	57	46	39
9.396t	4	697	148	135	132	119	108	85	67	54	45
9.374t	4	693	203	204	204	203	201	191	179	162	148
9.350t	4	696	94	83	81	78	74	66	56	48	42
9.325t	4	694	117	107	104	100	96	85	72	60	51
9.301t	4	694	93	82	81	74	68	58	49	41	34
9.275t	4	691	157	155	156	154	153	145	137	123	114
9.250t	4	693	118	111	108	102	97	84	69	55	46
9.225t	4	690	93	87	84	80	75	65	56	47	40
9.200t	4	697	99	95	88	84	80	69	59	49	40
9.173t	4	688	113	109	107	101	95	83	71	59	50
9.150t	4	690	100	92	92	87	83	73	62	52	43
9.125t	4	700	99	93	92	86	79	64	54	44	37
9.100t	4	695	147	134	130	121	113	94	80	66	56
9.076t	4	698	196	180	179	167	156	134	111	89	70
9.047t	4	695	182	167	166	162	156	138	119	98	81
9.024t	4	693	229	218	212	197	182	153	128	104	82
9.000t	4	694	204	196	189	178	167	146	125	106	90
8.975t	4	698	145	134	131	126	120	108	93	77	64
8.945t	4	700	141	133	130	125	118	105	90	74	61
8.920t	4	707	126	119	116	110	105	93	83	71	62
8.900t	4	688	108	94	91	87	82	71	63	52	44
8.875t	4	699	119	114	112	107	103	90	80	70	59
8.850t	4	698	119	111	109	106	102	92	82	70	59
8.825t	4	703	130	123	120	115	110	96	82	67	54
8.800t	4	694	109	99	94	91	87	75	68	56	47
8.775t	4	693	142	128	124	115	107	90	76	61	51
8.750t	4	698	133	124	121	115	109	94	80	65	53
8.723t	4	696	110	104	102	99	94	83	72	60	51
8.700t	4	695	210	198	193	184	174	144	114	86	64
8.674t	4	685	152	139	134	125	116	97	82	66	55
8.650t	4	694	176	169	164	154	144	120	99	77	62
8.622t	4	695	124	114	112	105	100	88	76	63	53
8.604t	4	691	135	130	125	122	117	106	93	79	68
8.575t	4	691	162	145	140	127	118	97	78	61	47
8.550t	4	692	114	102	99	92	86	73	62	51	43
8.525t	4	689	121	108	105	98	91	77	65	53	45
8.500t	4	691	133	122	116	109	102	87	73	59	49
8.475t	4	698	144	132	127	119	110	90	70	54	47
8.450t	4	695	167	148	142	130	117	96	78	61	51
8.423t	4	698	102	94	91	88	84	75	65	54	46
8.397t	4	696	104	94	93	88	84	72	62	54	44
8.370t	4	695	118	108	105	99	94	81	70	58	48
8.350t	4	690	122	111	109	102	95	80	64	54	41
8.325t	4	695	126	112	106	98	90	76	62	50	44
8.298t	4	697	109	101	97	91	85	72	61	50	43
8.275t	4	696	144	129	123	113	104	87	71	57	44

Geophone distances (mm):			0	200	300	450	600	900	1200	1500	1800
Chainage	Drop	Stress kPa	D1 Mic.	D2 Mic.	D3 Mic.	D4 Mic.	D5 Mic.	D6 Mic.	D7 Mic.	D8 Mic.	D9 Mic.
8.250t	4	697	145	127	121	113	104	87	72	57	47
8.225t	4	696	137	124	121	113	106	89	72	57	46
8.201t	4	696	132	116	111	103	97	81	67	54	45
8.175t	4	698	108	100	95	89	82	70	57	46	40
8.150t	4	694	126	117	112	103	96	78	65	52	43
8.124t	4	693	113	102	99	92	87	71	60	50	41
8.101t	4	706	123	112	108	99	93	79	66	56	46
8.070t	4	697	133	124	115	107	99	83	68	56	46
8.040t	4	701	124	118	116	107	98	78	63	51	43
8.020t	4	701	119	98	91	82	79	65	52	42	36
8.000t	4	703	169	150	139	122	106	83	65	48	41
7.975r	4	693	134	120	117	109	102	87	73	60	49
7.950t	4	695	138	116	110	103	96	83	70	57	47
7.926r	4	693	155	138	131	123	114	97	79	64	52
7.889t	4	699	130	109	104	97	89	75	62	52	41
7.864r	4	693	143	120	114	109	102	87	73	60	49
7.840t	4	698	137	121	117	110	103	88	74	59	48
7.819r	4	696	129	117	111	106	100	84	70	56	47
7.800t	4	696	135	119	114	107	99	81	66	54	45
7.775r	4	693	170	153	146	136	124	104	85	67	55
7.749t	4	702	130	114	109	102	94	79	67	55	47
7.725r	4	695	164	145	135	125	115	95	78	62	51
7.700t	4	688	111	99	96	90	85	73	60	49	43
7.675r	4	691	138	124	120	114	107	90	76	62	51
7.651t	4	695	118	105	101	94	89	77	64	54	44
7.625r	4	686	141	123	118	111	104	86	73	58	47
7.599t	4	691	122	108	103	97	90	76	63	50	42
7.575r	4	694	177	156	152	140	130	107	88	69	56
7.550t	4	690	122	109	108	100	93	79	66	52	43
7.525r	4	695	166	149	141	130	120	99	82	64	51
7.499t	4	692	141	126	116	109	100	84	69	55	45
7.474r	4	710	154	126	120	112	108	93	77	64	52
7.448t	4	697	128	112	109	103	99	84	70	57	46
7.425r	4	706	157	132	126	118	113	96	76	60	47
7.400t	4	697	153	120	116	108	101	84	68	55	44
7.375r	4	704	157	127	119	110	104	87	71	57	46
7.350t	4	698	143	114	110	104	99	84	70	58	46
7.325r	4	710	166	135	127	117	110	93	76	62	50
7.300t	4	693	138	111	106	98	93	78	64	52	42
7.275r	4	701	176	137	130	123	117	99	81	66	52
7.250t	4	698	121	98	95	90	86	73	60	49	41
7.225r	4	701	156	128	119	111	105	88	72	58	46
7.200t	4	691	135	111	108	102	95	81	66	54	42
7.175r	4	705	143	120	116	107	101	85	70	58	47
7.150t	4	689	138	110	106	98	92	77	63	51	42
7.125r	4	708	163	133	127	118	113	95	76	61	49
7.099t	4	695	118	100	97	91	88	77	63	52	42
7.074r	4	696	165	145	139	132	126	108	87	70	56
7.050t	4	698	139	118	115	106	99	82	65	51	41
7.025r	4	697	155	136	133	127	122	106	88	71	55
7.000t	4	688	135	105	100	91	85	71	59	48	39
6.975r	4	696	165	138	132	123	116	96	76	59	46
6.950t	4	692	122	93	89	83	78	66	55	45	37
6.925r	4	701	129	102	97	91	86	73	61	50	40
6.900t	4	699	121	101	98	92	86	73	60	48	38


Geophone distances (mm):			0	200	300	450	600	900	1200	1500	1800
Chainage	Drop	Stress kPa	D1 Mic.	D2 Mic.	D3 Mic.	D4 Mic.	D5 Mic.	D6 Mic.	D7 Mic.	D8 Mic.	D9 Mic.
6.873r	4	691	163	132	125	115	106	87	69	56	44
6.850t	4	691	135	113	109	102	96	80	66	54	44
6.825r	4	703	178	151	144	134	125	104	81	63	48
6.800t	4	689	123	98	95	88	82	67	54	43	35
6.775r	4	693	171	124	117	109	103	87	71	58	47
6.750t	4	699	123	102	99	91	85	71	57	47	39
6.725r	4	689	148	127	121	110	102	83	67	53	42
6.700t	4	699	132	107	104	97	91	76	61	47	38
6.674r	4	693	139	123	119	111	104	87	69	55	45
6.649t	4	689	128	100	96	89	83	68	55	44	36
6.625r	4	697	151	120	115	108	102	85	68	55	44
6.600t	4	690	130	102	99	93	87	72	57	46	37
6.574r	4	702	145	126	120	111	105	88	71	57	44
6.550t	4	692	98	84	80	75	71	61	52	44	36
6.524r	4	698	168	130	123	114	107	88	71	56	45
6.500t	4	693	118	102	99	92	88	76	63	52	43
6.474r	4	692	161	138	133	122	115	94	75	60	47
6.450t	4	685	126	103	100	92	86	71	58	47	39
6.425r	4	691	195	161	151	137	125	100	79	61	48
6.400t	4	686	138	120	115	106	100	82	66	53	43
6.375r	4	691	168	145	137	126	117	97	79	63	49
6.350t	4	696	126	98	93	87	82	70	58	48	39
6.325r	4	691	150	117	112	106	101	86	71	58	47
6.299t	4	691	150	112	107	101	96	81	66	54	43
6.274r	4	694	106	67	64	57	51	42	35	29	24
6.250t	4	686	130	116	110	102	94	78	64	51	41
6.224r	4	695	165	136	129	118	109	88	69	53	41
6.200t	4	686	135	103	98	90	83	67	54	43	35
6.175r	4	686	198	151	142	130	117	93	71	56	42
6.149t	4	691	159	112	105	99	92	77	62	51	41
6.125r	4	691	136	106	102	94	85	71	57	47	37
6.100t	4	702	124	99	93	84	78	65	52	44	35
6.075r	4	699	158	123	117	106	96	75	58	46	35
6.050t	4	699	141	96	89	82	76	62	49	39	31
6.024r	4	689	123	100	95	88	83	73	59	47	38
6.000t	4	690	156	126	122	112	105	85	68	55	45
5.975r	4	705	172	116	107	100	93	78	63	50	40
5.950t	4	716	144	104	103	95	88	73	60	49	41
5.924r	4	696	146	119	116	109	104	91	76	65	54
5.900t	4	689	185	133	116	100	91	75	62	51	41
5.875r	4	694	174	138	131	121	113	96	78	61	49
5.850t	4	687	134	106	105	99	94	83	71	59	47
5.825r	4	681	207	177	168	152	140	110	87	66	51
5.799t	4	699	142	103	100	95	91	79	67	55	46
5.775r	4	695	202	156	146	133	124	105	88	73	59
5.750t	4	688	133	109	105	100	95	83	70	58	48
5.725r	4	679	154	122	116	107	100	83	66	53	43
5.699t	4	681	136	104	100	95	90	79	67	56	46
5.675r	4	700	135	108	104	96	91	76	63	51	42
5.650t	4	697	162	119	111	102	95	78	62	50	39
5.625r	4	684	195	160	148	130	117	91	71	56	43
5.600t	4	692	154	114	110	100	92	73	57	45	36

Geophone distances (mm):			0	200	300	450	600	900	1200	1500	1800
Chainage	Drop	Stress kPa	D1 Mic.	D2 Mic.	D3 Mic.	D4 Mic.	D5 Mic.	D6 Mic.	D7 Mic.	D8 Mic.	D9 Mic.
5.575r	4	696	165	139	133	123	115	94	74	58	45
5.550t	4	684	151	115	109	101	92	72	56	43	34
5.525r	4	691	193	150	138	122	110	86	67	52	41
5.500t	4	688	177	128	124	112	101	78	60	46	37
5.474r	4	694	197	146	135	127	119	98	79	63	48
5.450t	4	681	184	133	126	114	103	78	60	48	38
5.425r	4	689	222	159	145	130	117	91	71	57	45
5.400t	4	691	197	163	154	137	122	92	70	54	41
5.375r	4	687	246	191	178	161	145	114	88	68	52
5.350t	4	681	182	138	133	122	113	90	70	56	44
5.325r	4	701	176	143	136	126	119	99	81	66	53
5.300t	4	683	157	140	134	122	113	91	73	59	46
5.275r	4	686	242	192	180	162	148	115	89	72	55
5.250t	4	691	167	132	126	115	104	80	61	49	39
5.225r	4	695	190	143	133	121	112	91	73	60	47
5.200t	4	686	157	119	117	109	101	81	64	50	39
5.175r	4	688	215	160	148	137	127	104	82	64	50
5.150t	4	685	199	146	138	123	110	84	65	52	41
5.125r	4	688	214	158	148	135	125	101	81	64	52
5.099t	4	685	145	117	114	106	100	84	70	57	46
5.075r	4	692	255	192	176	158	143	113	87	66	51
5.049t	4	680	149	110	107	100	94	78	62	48	37
5.025r	4	689	210	153	142	130	120	98	78	63	50
5.000t	4	686	173	124	118	109	100	79	61	49	39
4.975r	4	693	219	171	161	149	138	112	86	68	53
4.950t	4	684	155	113	111	102	96	77	61	47	37
4.925r	4	694	191	148	138	126	117	94	76	62	49
4.900t	4	690	125	98	96	88	84	72	59	50	41
4.875r	4	699	219	174	160	144	132	107	85	68	52
4.850t	4	684	129	101	97	92	87	74	62	52	42
4.824r	4	695	175	141	133	124	118	100	82	67	53
4.800t	4	690	147	111	108	100	93	77	63	51	41
4.775r	4	691	251	187	171	155	143	113	88	69	54
4.750t	4	691	171	121	117	110	104	87	71	59	47
4.725r	4	698	167	116	108	101	96	80	66	54	44
4.700t	4	695	127	101	99	92	87	74	62	51	43
4.675r	4	691	185	140	132	122	115	97	80	65	52
4.650t	4	686	152	109	105	96	88	71	57	45	36
4.625r	4	683	211	156	146	135	127	108	87	69	55
4.600t	4	687	146	113	111	104	98	81	65	53	42
4.575r	4	696	204	161	152	141	131	107	84	67	52
4.550t	4	685	168	130	126	118	111	92	74	59	47
4.525r	4	691	199	162	155	145	138	116	95	78	62
4.500t	4	688	168	131	126	116	107	88	71	58	47
4.475r	4	693	160	110	95	79	70	56	47	39	31
4.450t	4	686	158	118	113	105	98	81	67	55	46
4.425r	4	690	208	155	144	130	120	95	74	58	46
4.400t	4	686	155	113	111	105	101	88	73	60	47
4.375r	4	679	265	201	182	158	141	107	80	61	46
4.350t	4	689	193	154	147	135	125	104	82	64	51
4.325r	4	677	223	184	173	152	143	114	90	71	56


Geophone distances (mm):			0	200	300	450	600	900	1200	1500	1800
Chainage	Drop	Stress kPa	D1 Mic.	D2 Mic.	D3 Mic.	D4 Mic.	D5 Mic.	D6 Mic.	D7 Mic.	D8 Mic.	D9 Mic.
4.300t	4	695	231	180	171	161	152	129	106	87	70
4.275r	4	698	271	204	192	175	162	134	109	86	67
4.250t	4	697	216	157	151	139	131	109	87	69	54
4.225r	4	681	336	268	250	222	199	150	111	87	67
4.200t	4	701	205	174	167	150	140	116	93	72	56
4.175r	4	692	207	171	168	155	148	125	99	79	61
4.150t	4	690	191	151	147	136	129	107	84	68	51
4.124r	4	682	194	172	170	155	146	120	98	78	61
4.100t	4	692	191	144	137	127	117	92	72	57	45
4.075r	4	697	217	181	172	159	146	122	97	77	59
4.050t	4	695	197	160	156	146	138	112	87	67	52
4.025r	4	690	214	191	185	169	160	131	106	84	66
4.000t	4	694	164	139	136	123	114	91	72	55	44
3.975r	4	695	272	204	181	156	139	109	85	67	54
3.949t	4	686	230	178	168	148	133	105	83	66	53
3.925r	4	690	283	225	200	170	152	111	80	62	47
3.900t	4	686	229	159	143	120	103	76	58	45	36
3.875r	4	694	306	217	188	160	140	105	81	64	52
3.850t	4	684	197	144	135	119	106	83	66	52	42
3.825r	4	689	313	224	189	154	128	91	66	52	42
3.800t	4	690	200	156	144	125	111	84	64	50	41
3.775r	4	684	362	269	218	180	152	110	80	62	51
3.749t	4	701	215	154	142	126	114	87	67	53	42
3.724r	4	686	355	265	226	190	162	116	84	64	51
3.700t	4	692	315	219	182	147	125	91	70	55	44
3.674r	4	705	256	203	183	160	143	111	87	70	56
3.649t	4	702	237	172	146	120	104	79	62	49	39
3.625r	4	699	299	220	183	149	127	92	70	57	47
3.600t	4	699	236	160	134	113	101	80	63	51	41
3.575r	4	689	293	227	199	173	153	114	88	70	57
3.549t	4	697	285	204	168	136	117	90	69	55	45
3.525r	4	684	255	203	188	167	150	116	89	70	56
3.500t	4	700	257	185	158	136	121	96	74	61	50
3.474r	4	692	282	224	205	183	168	132	102	80	63
3.450t	4	699	306	225	194	162	139	101	76	59	48
3.425r	4	692	309	223	198	172	151	112	86	68	55
3.400t	4	699	264	195	169	141	123	91	69	55	43
3.374r	4	695	365	303	268	223	186	129	90	69	54
3.350t	4	694	321	233	199	165	139	100	75	59	47
3.325r	4	686	296	243	224	192	167	121	90	70	56
3.300t	4	690	326	245	211	175	150	111	86	68	55
3.275r	4	693	341	289	262	228	198	143	103	78	60
3.249t	4	689	258	198	177	151	134	101	78	62	51
3.225r	4	688	425	355	309	254	211	141	102	76	60
3.200t	4	690	368	275	229	182	151	106	79	62	50
3.174r	4	692	397	321	279	229	192	133	97	76	62
3.149t	4	695	362	259	211	166	135	95	72	56	46
3.125r	4	696	322	278	246	205	172	115	83	65	53
3.100t	4	690	267	193	165	136	116	85	66	53	42
3.075r	4	692	290	259	234	202	174	125	91	70	56
3.050t	4	697	270	194	166	139	120	92	70	55	46

Geophone distances (mm):			0	200	300	450	600	900	1200	1500	1800
Chainage	Drop	Stress kPa	D1 Mic.	D2 Mic.	D3 Mic.	D4 Mic.	D5 Mic.	D6 Mic.	D7 Mic.	D8 Mic.	D9 Mic.
3.025r	4	702	313	263	236	197	168	120	88	68	56
3.000t	4	701	342	220	174	136	114	83	64	51	42
2.975r	4	693	287	239	214	182	156	110	79	62	49
2.950t	4	681	302	213	175	141	123	90	68	58	47
2.925r	4	692	306	249	221	189	163	121	88	71	57
2.900t	4	687	343	236	193	155	133	97	77	62	50
2.875r	4	680	320	266	237	202	177	128	94	74	56
2.850t	4	684	306	240	215	188	165	120	89	68	53
2.825r	4	684	291	202	173	145	126	88	64	50	41
2.799t	4	690	241	178	153	130	113	83	64	50	42
2.775r	4	685	315	233	198	161	138	96	69	56	46
2.750t	4	682	399	308	266	219	182	125	91	70	55
2.730r	4	680	326	231	189	151	119	78	54	43	32
2.700t	4	680	299	217	181	143	113	71	50	39	33
2.674r	4	697	368	271	228	176	136	82	55	43	35
2.650t	4	684	270	196	168	134	112	74	54	42	34
2.625r	4	688	304	222	187	148	118	74	51	41	33
2.603t	4	689	305	213	177	138	109	71	47	36	29
2.575r	4	693	327	240	203	165	134	85	57	42	33
2.550t	4	692	315	224	189	149	118	74	52	38	30
2.524r	4	693	358	268	231	186	148	90	58	43	33
2.500t	4	688	335	259	233	192	161	108	77	57	46
2.474r	4	692	374	284	243	187	146	88	62	52	43
2.450t	4	684	428	329	277	220	178	118	89	72	58
2.425r	4	693	340	291	266	225	190	126	83	56	42
2.400t	4	700	346	326	304	241	193	120	76	51	37
2.375r	4	698	134	108	102	95	91	75	57	44	37
2.350t	4	692	246	196	177	152	134	101	77	61	49
2.325r	4	686	251	213	194	172	157	122	97	77	62
2.300t	4	681	323	254	228	193	168	120	87	66	51
2.275r	4	696	314	263	242	211	186	135	98	74	57
2.250t	4	685	375	309	270	223	186	130	93	70	53
2.225r	4	690	285	224	201	168	142	101	72	55	43
2.200t	4	692	243	189	161	129	104	67	47	35	27
2.175r	4	687	381	306	268	218	185	132	99	77	61
2.150t	4	693	165	142	132	119	108	89	74	61	53
2.124r	4	687	255	210	182	146	122	90	71	59	50
2.100t	4	694	290	233	214	186	161	113	81	61	50
2.074r	4	698	333	267	243	205	175	127	96	74	56
2.050t	4	699	179	160	151	134	121	101	78	63	48
2.025r	4	698	263	227	211	189	170	130	100	78	61
2.000t	4	685	444	332	288	233	193	129	92	69	54

Measured deflections and load @ 75 kN: N321 0HR-M R-L

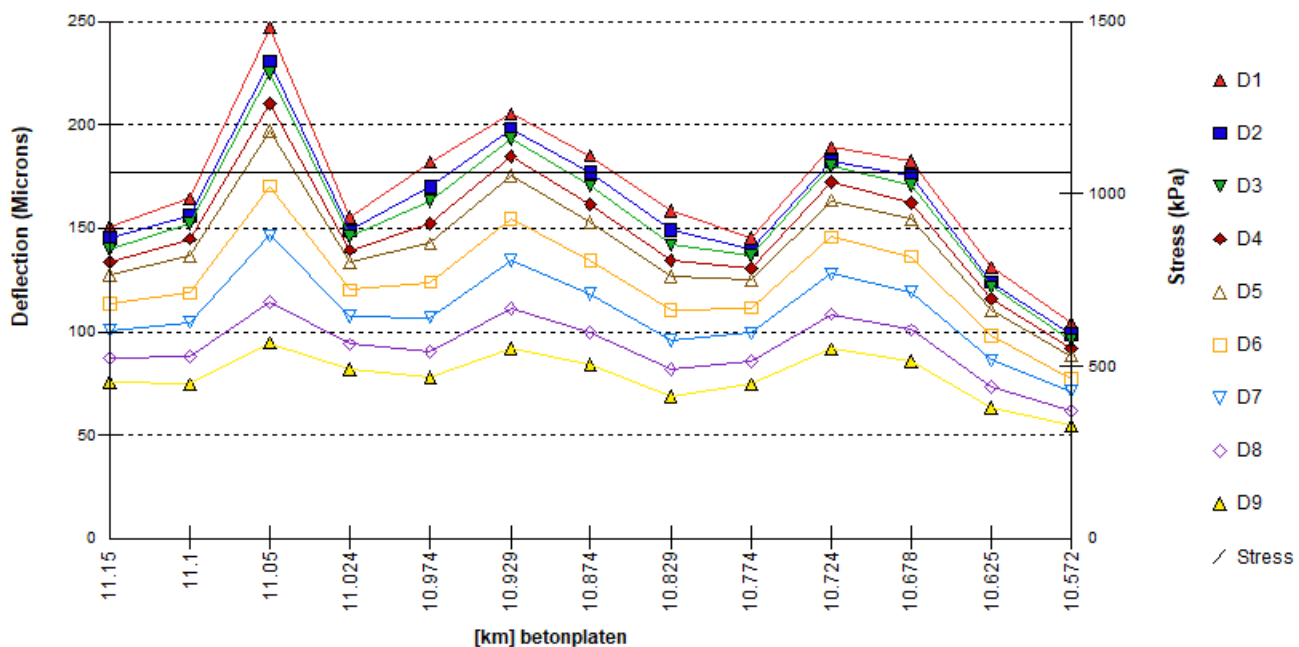


Deflections, accumulated difference @ 75 kN: N321 0HR-M R-L

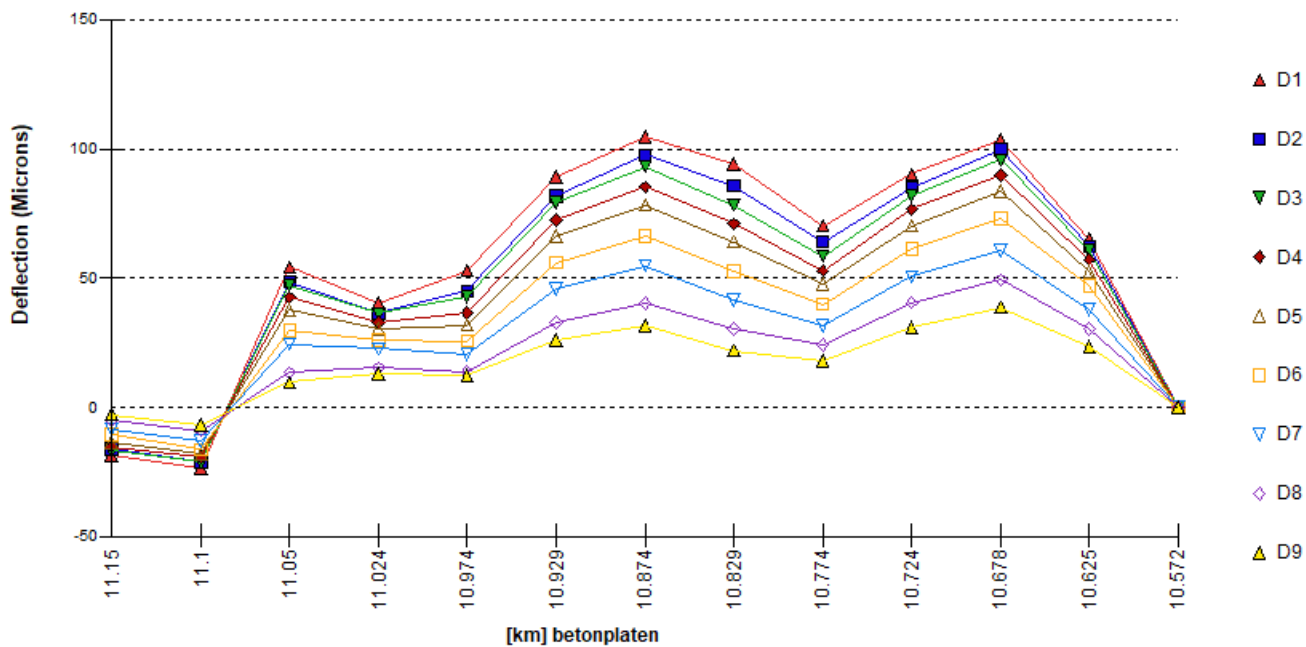


Statistics Report**N321_0HRM_RL_11150_75kN_f25**

Subject	Section	Drop	Start	End	Points	Mean	STD
Deflection 01, 0	0	4	11.150	10.572	13	169	36.000
Deflection 02, 200	0	4	11.150	10.572	13	161	34.000
Deflection 03, 300	0	4	11.150	10.572	13	157	33.000
Deflection 04, 450	0	4	11.150	10.572	13	149	31.000
Deflection 05, 600	0	4	11.150	10.572	13	141	28.000
Deflection 06, 900	0	4	11.150	10.572	13	124	24.000
Deflection 07, 1200	0	4	11.150	10.572	13	109	20.000
Deflection 08, 1500	0	4	11.150	10.572	13	92	15.000
Deflection 09, 1800	0	4	11.150	10.572	13	78	12.000

Measured deflections and load @ 50 kN: N321 0HR-M R-L

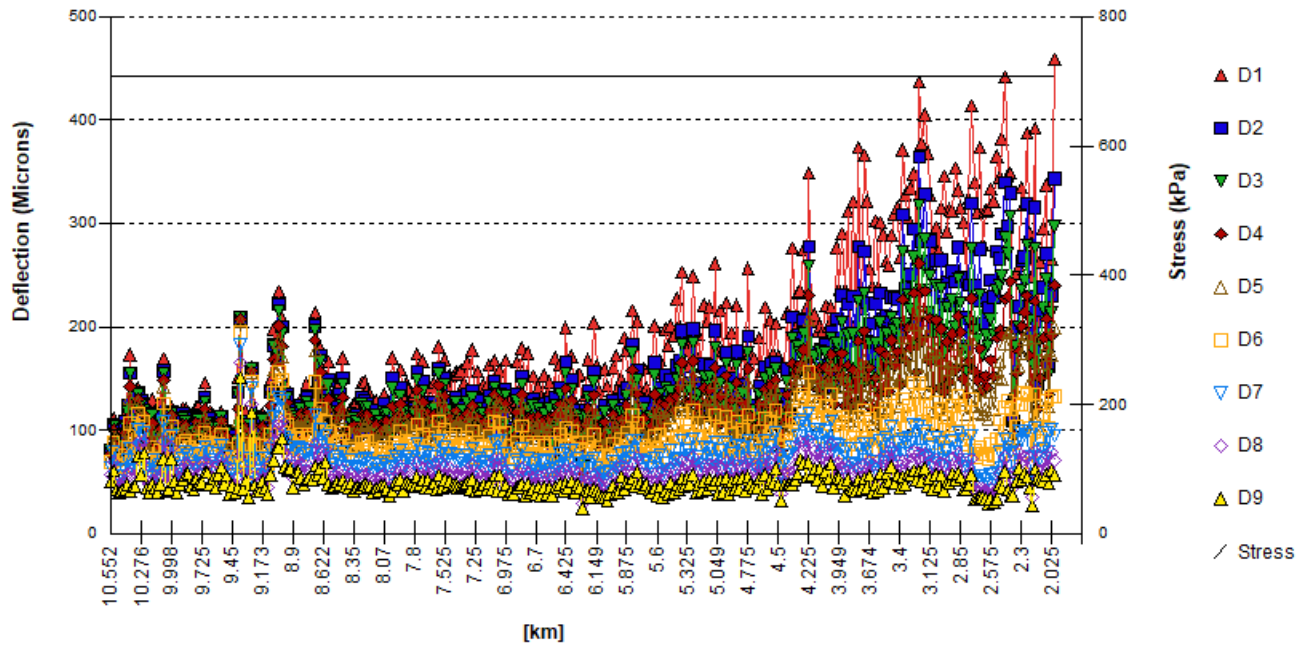

Deflections, accumulated difference @ 50 kN: N321 0HR-M R-L

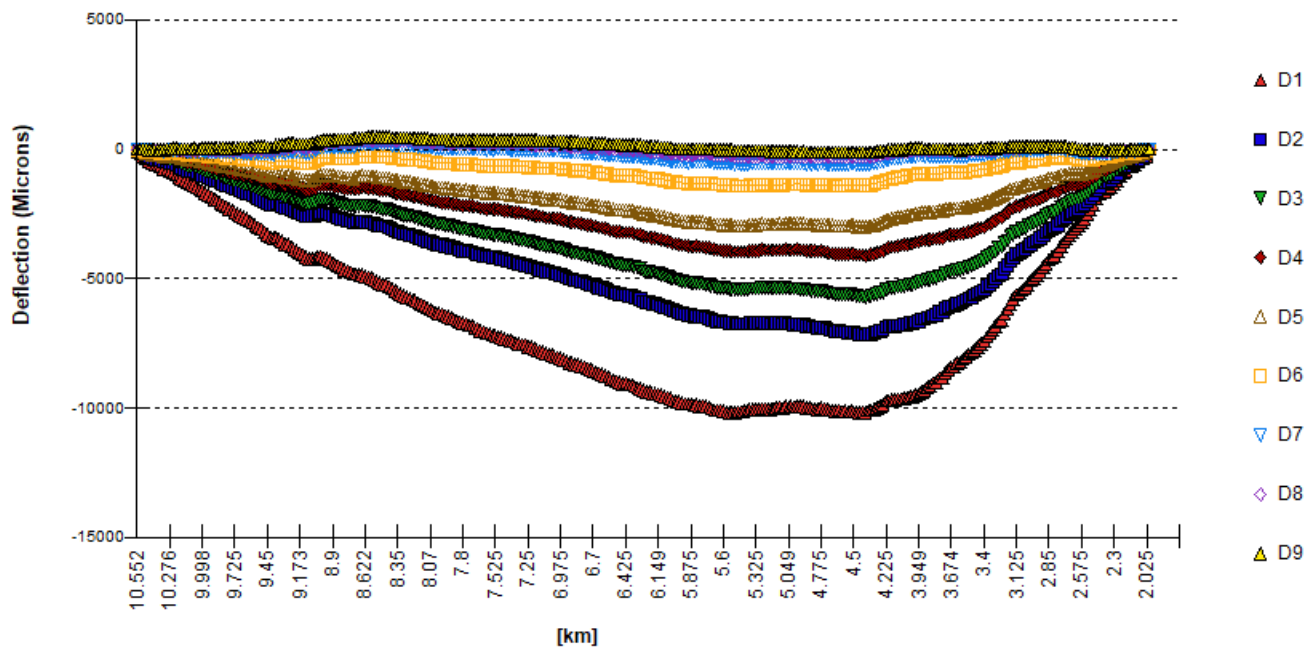

Statistics Report**N321_0HRM_RL_10550_f25**

Subject	Section	Drop	Start	End	Points	Mean	STD
Deflection 01, 0	0	4	10.552	2.000	343	188	80.000
Deflection 02, 200	0	4	10.552	2.000	343	153	58.000
Deflection 03, 300	0	4	10.552	2.000	343	142	48.000
Deflection 04, 450	0	4	10.552	2.000	343	128	37.000
Deflection 05, 600	0	4	10.552	2.000	343	116	30.000
Deflection 06, 900	0	4	10.552	2.000	343	93	20.000
Deflection 07, 1200	0	4	10.552	2.000	343	75	16.000
Deflection 08, 1500	0	4	10.552	2.000	343	60	13.000
Deflection 09, 1800	0	4	10.552	2.000	343	49	11.000