


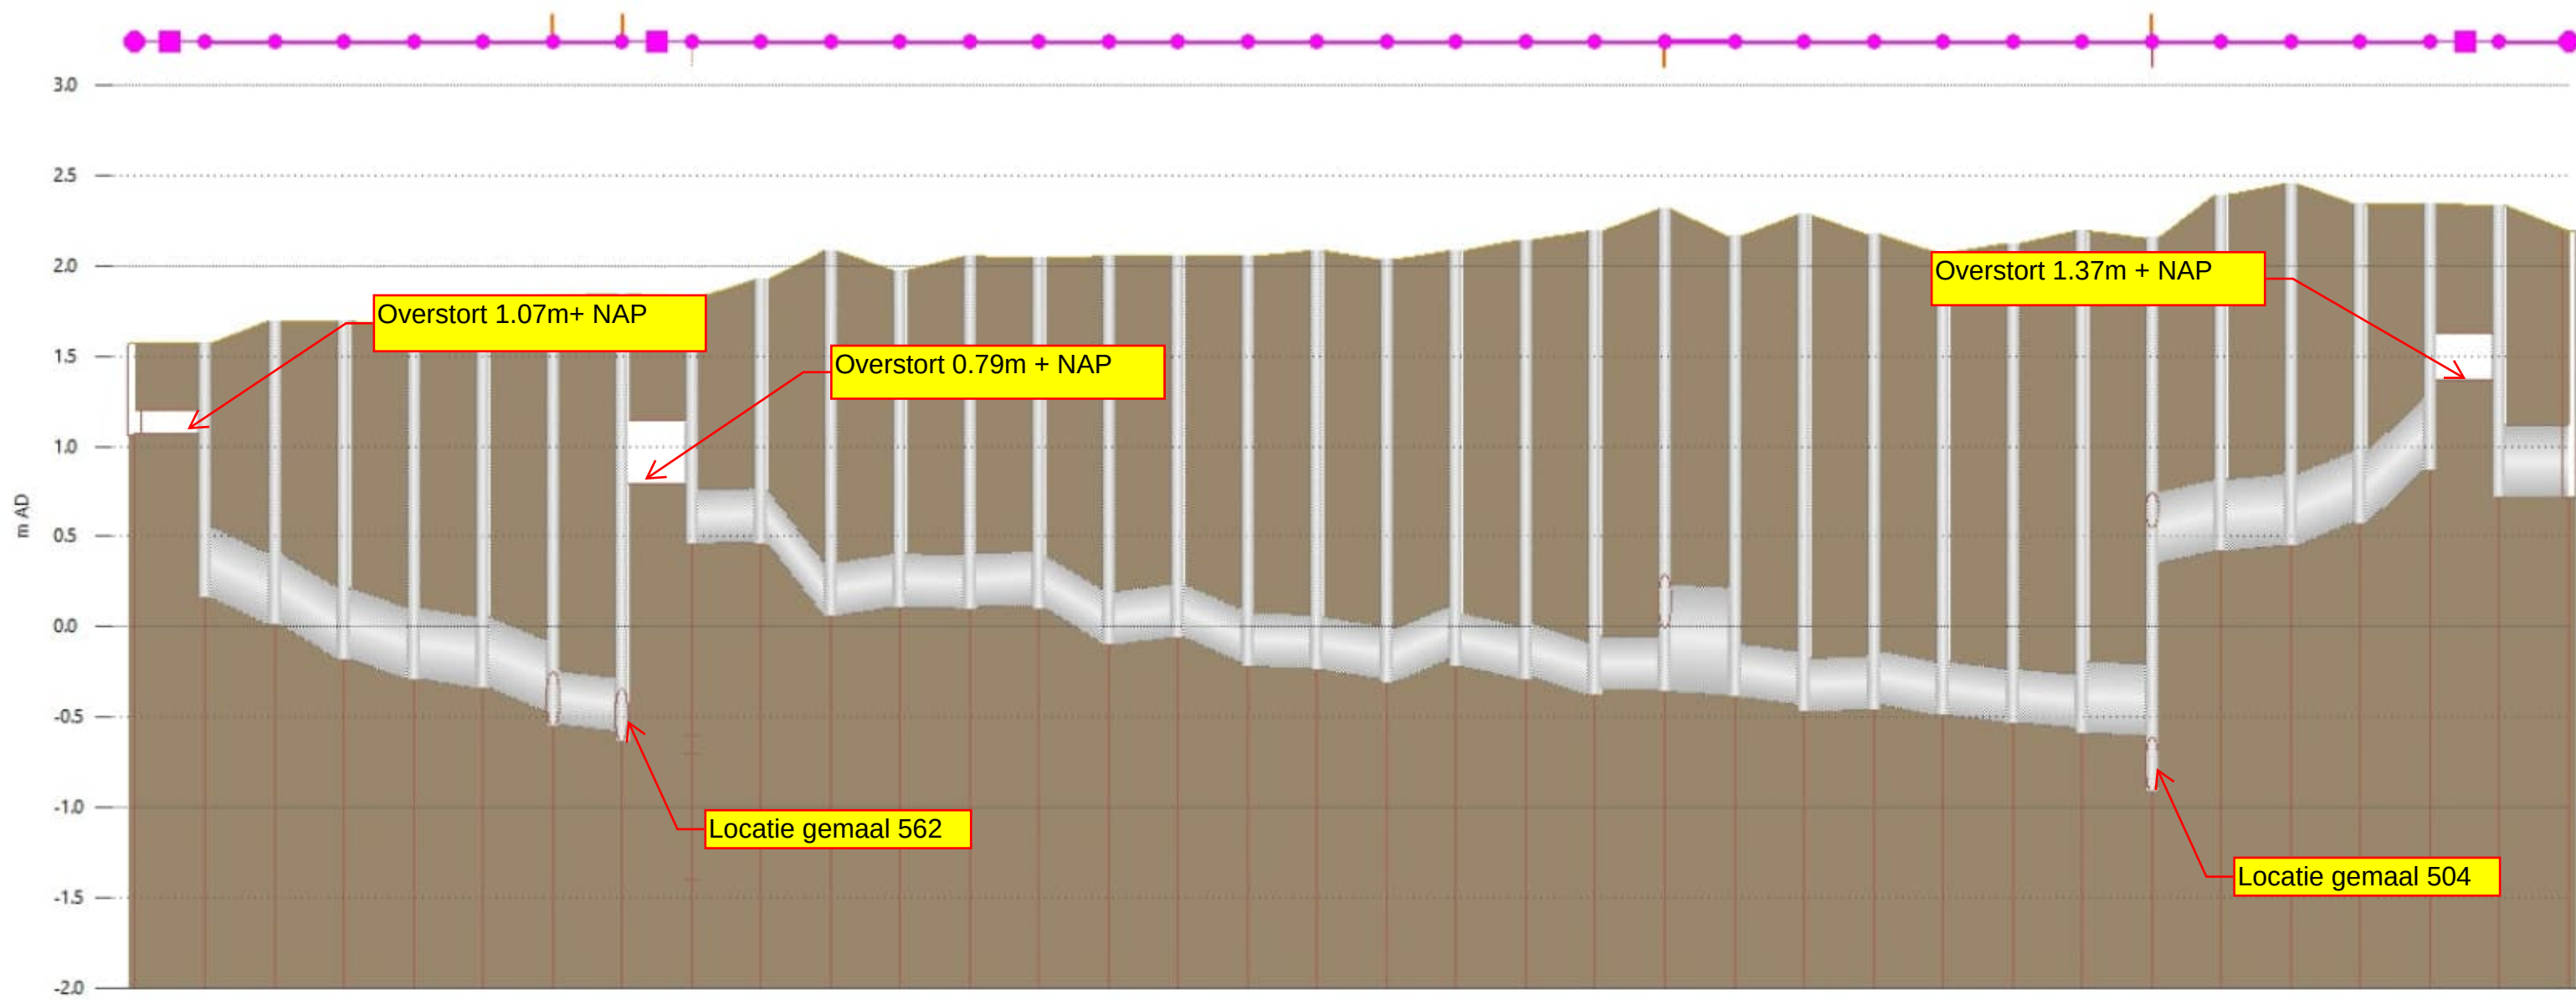

Link	5052.1	5051.1	5050.1	5049.1	5048.1	5035.1	-	-	5032.1	5031.1	5030.1	5029.1	5028.1	5027.1	5026.1	5025.1	5024.1	5023.1	5022.1	5021.1	5020.1	5019.2	5019.1	5012.1	5011.1	5010.1	5009.1	5008.1	5007.2	5005.1	5004.1	5003.1	5003.2	5001.1	-	
width (mm)		400	400	400	400	400	300		300	300	300	300	300	300	300	300	300	300	300	300	300	300	600	300	300	300	300	300	400	400	400	400	400	400		
height (mm)		400	400	400	400	400	300		300	300	300	300	300	300	300	300	300	300	300	300	300	300	600	300	300	300	300	300	400	400	400	400	400	400		
length (m)		48.0	52.1	52.1	47.9	48.5	34.7		34.8	37.9	36.0	9.6	38.0	4.4	37.8	39.9	34.1	16.2	14.2	40.0	16.2	23.2	7.1	38.5	27.6	5.7	59.5	31.6	27.7	75.0	46.0	48.6	47.6	2.2		
us inv (m AD)		0.010	-0.180	-0.290	-0.340	-0.470	-0.580		0.470	0.060	0.110	0.100	0.120	-0.090	-0.060	-0.200	-0.230	-0.290	-0.180	-0.290	-0.380	-0.350	-0.360	-0.430	-0.460	-0.490	-0.530	-0.560	-0.600	0.420	0.450	0.580	0.570	0.720		
ds inv (m AD)		0.160	0.010	-0.180	-0.290	-0.340	-0.540		0.460	0.460	0.060	0.110	0.110	0.100	-0.100	-0.060	-0.220	-0.240	-0.310	-0.220	-0.280	-0.350	-0.380	-0.390	-0.470	-0.430	-0.490	-0.530	-0.590	0.350	0.420	0.450	0.870	0.720		
Crest (m AD)	1.070							0.790																										1.370		
Node	-	5052	5051	5050	5049	5048	5035	-	-	5032	5031	5030	5029	5028	5027	5026	5025	5024	5023	5022	5021	5020	5019	5054	5012	5011	5010	5009	5008	5007	5005	5004	5003	5001	-	-
ground (m AD)	-	1.570	1.690	1.690	1.660	1.660	1.830	1.840	1.820	1.920	2.080	1.970	2.050	2.040	2.050	2.050	2.050	2.080	2.030	2.080	2.140	2.190	2.310	2.160	2.280	2.170	2.070	2.120	2.190	2.150	2.390	2.450	2.340	2.340	2.330	-