

Productsheet

ServiceGate V2 router



 **remote engineer**
Simply Connect and Control



Remote Engineer B.V.
+31 527 712 049
info@remoteengineer.eu
www.remoteengineer.eu

ServiceGate V2 router

Omschrijving

De ServiceGate is terug! Met trots presenteren wij het vlaggenschipmodel van de nieuwste generatie Remote Engineer routers. De ServiceGate V2 beschikt naast een snelle switch over USB 2.0 en optioneel de mogelijkheid om via 4G verbinding te maken met uw supportnetwerk.

De vernieuwde metalen behuizing van de router is robuuster dan ooit en toch zo'n 30% in afmeting afgenomen. Deze kleine krachtpatser is klaar voor de toekomst en vormt de basis voor de nieuwe serie Remote Engineer routers. De ServiceGate V2 is direct uit voorraad leverbaar.



Specificaties

| | |
|-------------------|----------------------------|
| Processor | ATHEROS |
| RAM | 64MB |
| Flash | 8MB |
| Ethernet | 1x Fast Ethernet (WAN) |
| Ethernet (LAN) | 4x Fast Ethernet (LAN) |
| | WiFi |
| Serial poort | RS-232/422/485(DB9) |
| USB | 2x USB 2.0 aan de voorkant |
| Stroomvoorziening | 8-48 VDC input |


Optioneel: Sierra Wireless MC73XX

Fysiek

| | |
|------------|----------------------|
| Afmetingen | (LxBxH) 121x98x46 mm |
| Gewicht | 0,35kg |
| Montage | DIN Rail |

Omgevingsvariabelen

| | |
|-------------------------|-------------------------|
| Bedrijfstemperatuur | -5 - +55°C |
| Temperatuur voor opslag | -30 - +60°C |
| Certificaten | FCC Class A, CE Class A |
| Garantie | 12 maanden |

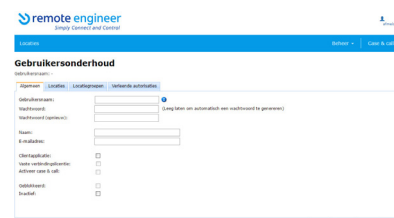



ServiceGate V2 router

Description

Service Gate is back! We proudly present the flagship model of the latest generation Remote Engineer router. The Service Gate V2 has in addition to a rapid switch over USB 2.0 and, optionally, the ability to make 4G via connection to your network support. The redesigned metal body of the router is more robust as ever and still declined about 30% in size. This little powerhouse is ready for the future and forms the basis for the new series Remote Engineer routers. Service Gate V2 is available from stock.



Specifications


| | |
|----------------|-------------------------|
| Processor | ATHEROS |
| RAM | 64MB |
| Flash | 8MB |
| Ethernet | 1x Fast Ethernet (WAN) |
| Ethernet (LAN) | 4x Fast Ethernet (LAN) |
| | WiFi |
| Serial port | RS-232/422/485(DB9) |
| USB | 2x USB 2.0 at the front |
| Power | 8-48 VDC input |
| Optional | Sierra Wireless MC73XX |

Appearance

| | |
|------------|----------------------|
| Dimensions | (LxBxH) 121x98x46 mm |
| Weight | 0,35kg |
| Montage | DIN Rail |

Environment Variables

| | |
|-----------------------|-------------------------|
| Operating temperature | -5 - +55°C |
| Storage Temperature | -30 - +60°C |
| Certifications | FCC Class A, CE Class A |
| Warranty | 12 months |

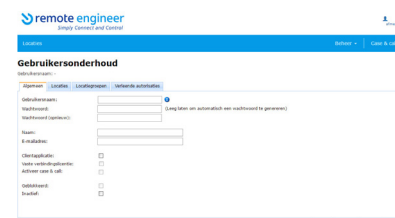

Remote Engineer B.V.
+31 527 712 049
info@remoteengineer.eu
www.remoteengineer.eu

Al uw locaties beschikbaar via desktop, smartphone en tablet



VNC | RDP | HTTP | SSH



Wij komen graag vrijblijvend bij u langs
om de mogelijkheden te demonstreren.

 **remote engineer**
Simply Connect and Control

Remote Engineer B.V.
+31 527 712 049
info@remoteengineer.eu
www.remoteengineer.eu