


Specification of Conductor:

Solid Conductor 2,5mmØ

Material: CuETP, no. CW003 or CW004A EN 1977:2012

Properties according to EN 13602:2012

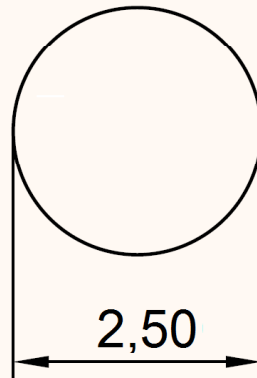

Technical properties :

Material		CuETP
Number of single Wires		1
Diameter of wires (+/- 0,03mm)	[mm]	2,5
Nominal Cross Section	[mm ²]	4,91
Max. Breaking Load	[kN]	1,48
Tensile strength	[N/mm ²]	Max. 300
Min. Elongation at Break L ₂₀₀	[%]	25
Min. Conductivity at 20°C	[m/Ωmm ²]	58,0
Min. Conductivity at 20°C	[%IACS]	100
Weight of Conductor	[Kg/km]	44