

Handbediening
O.V.L. Avond (Bruin)
AAN / AUTOMATISCH



Handbediening
O.V.L. Nacht (Zwart)
AAN / AUTOMATISCH



Specificatie OVL binnenkasten Heerhugowaard



SPECIFICATIE BINNENKAST 3 GROEPEN HEERHUGOWAARD

1 Eldon schakelkast leeg MAS0604021R5

incl montage platen

Diverse wartels

Diverse montage materialen

Aardingsrail 63A

1 Hager Installatieautomaat 1P+N/6A MHN506

2 Schneider Electric drukknop ZB4BW333 GROEN

2 Schneider Electric bevestigingring ZB4BZ009

2 Schneider Electric hulpcontact ZBE101

1 Loxone voeding

1 Loxone miniserver

Programering conform standaard P. De Jong Kabelmetingen

1 Connel 4G modem / Router

Communicatie conform standaard P. De Jong Kabelmetingen

1 Kast antenne

1 Hager Lastscheider 4P 40A HAB404

1 Hager afschermkap HZC212

1 Hager verbindingsrail 13X1P. BL. KB163N

3 Eaton PASCO 1P-N LPC25

6 Hager magneetschakelaar 25A 1M. 1V. 230V

1 GE Aardlekautomaat B 16A/30MA

1 Rital contactdoos

Diverse weidmuller klemmen

Diverse VDS

Diverse kleinmateriaal

Voor advies/levering P. de Jong Kabelmetingen (072-5316002)

SPECIFICATIE BINNENKAST 6 GROEPEN HEERHUGOWAARD

1 Eldon schakelkast leeg MAS0604021R5

incl montage platen

Diverse wartels

Diverse montage materialen

Aardingsrail 63A

1 Hager Installatieautomaat 1P+N/6A MHN506

2 Schneider Electric drukknop ZB4BW333 GROEN

2 Schneider Electric bevestigingring ZB4BZ009

2 Schneider Electric hulpcontact ZBE101

1 Loxone voeding

1 Loxone miniserver

Programering conform standaard P. De Jong Kabelmetingen

1 Connel 4G modem / Router

Communicatie conform standaard P. De Jong Kabelmetingen

1 Kast antenne

1 Hager Lastscheider 4P 40A HAB404

1 Hager afschermkap HZC212

1 Hager verbindingsrail 13X1P. BL. KB163N

6 Eaton PASCO 1P-N LPC25

12 Hager magneetschakelaar 25A 1M. 1V. 230V

1 GE Aardlekautomaat B 16A/30MA

1 Rital contactdoos

Diverse weidmuller klemmen

Diverse VDS

Diverse kleinmateriaal

Voor advies/levering P. de Jong Kabelmetingen (072-5316002)

SPECIFICATIE BINNENKAST 9 GROEPEN HEERHUGOWAARD

1 Eldon schakelkast leeg MAS0606021R5

incl montage platen

Diverse wartels

Diverse montage materialen

Aardingsrail 63A

1 Hager Installatieautomaat 1P+N/6A MHN506

2 Schneider Electric drukknop ZB4BW333 GROEN

2 Schneider Electric bevestigingring ZB4BZ009

2 Schneider Electric hulpcontact ZBE101

1 Loxone voeding

1 Loxone miniserver

Programering conform standaard P. De Jong Kabelmetingen

1 Connel 4G modem / Router

Communicatie conform standaard P. De Jong Kabelmetingen

1 Kast antenne

1 Hager Lastscheider 4P 40A HAB404

1 Hager afschermkap HZC212

1 Hager verbindingsrail 13X1P. BL. KB163N

9 Eaton PASCO 1P-N LPC25

18 Hager magneetschakelaar 25A 1M. 1V. 230V

1 GE Aardlekautomaat B 16A/30MA


1 Rital contactdoos

Diverse weidmuller klemmen

Diverse VDS

Diverse kleinmateriaal

Voor advies/levering P. de Jong Kabelmetingen (072-5316002)

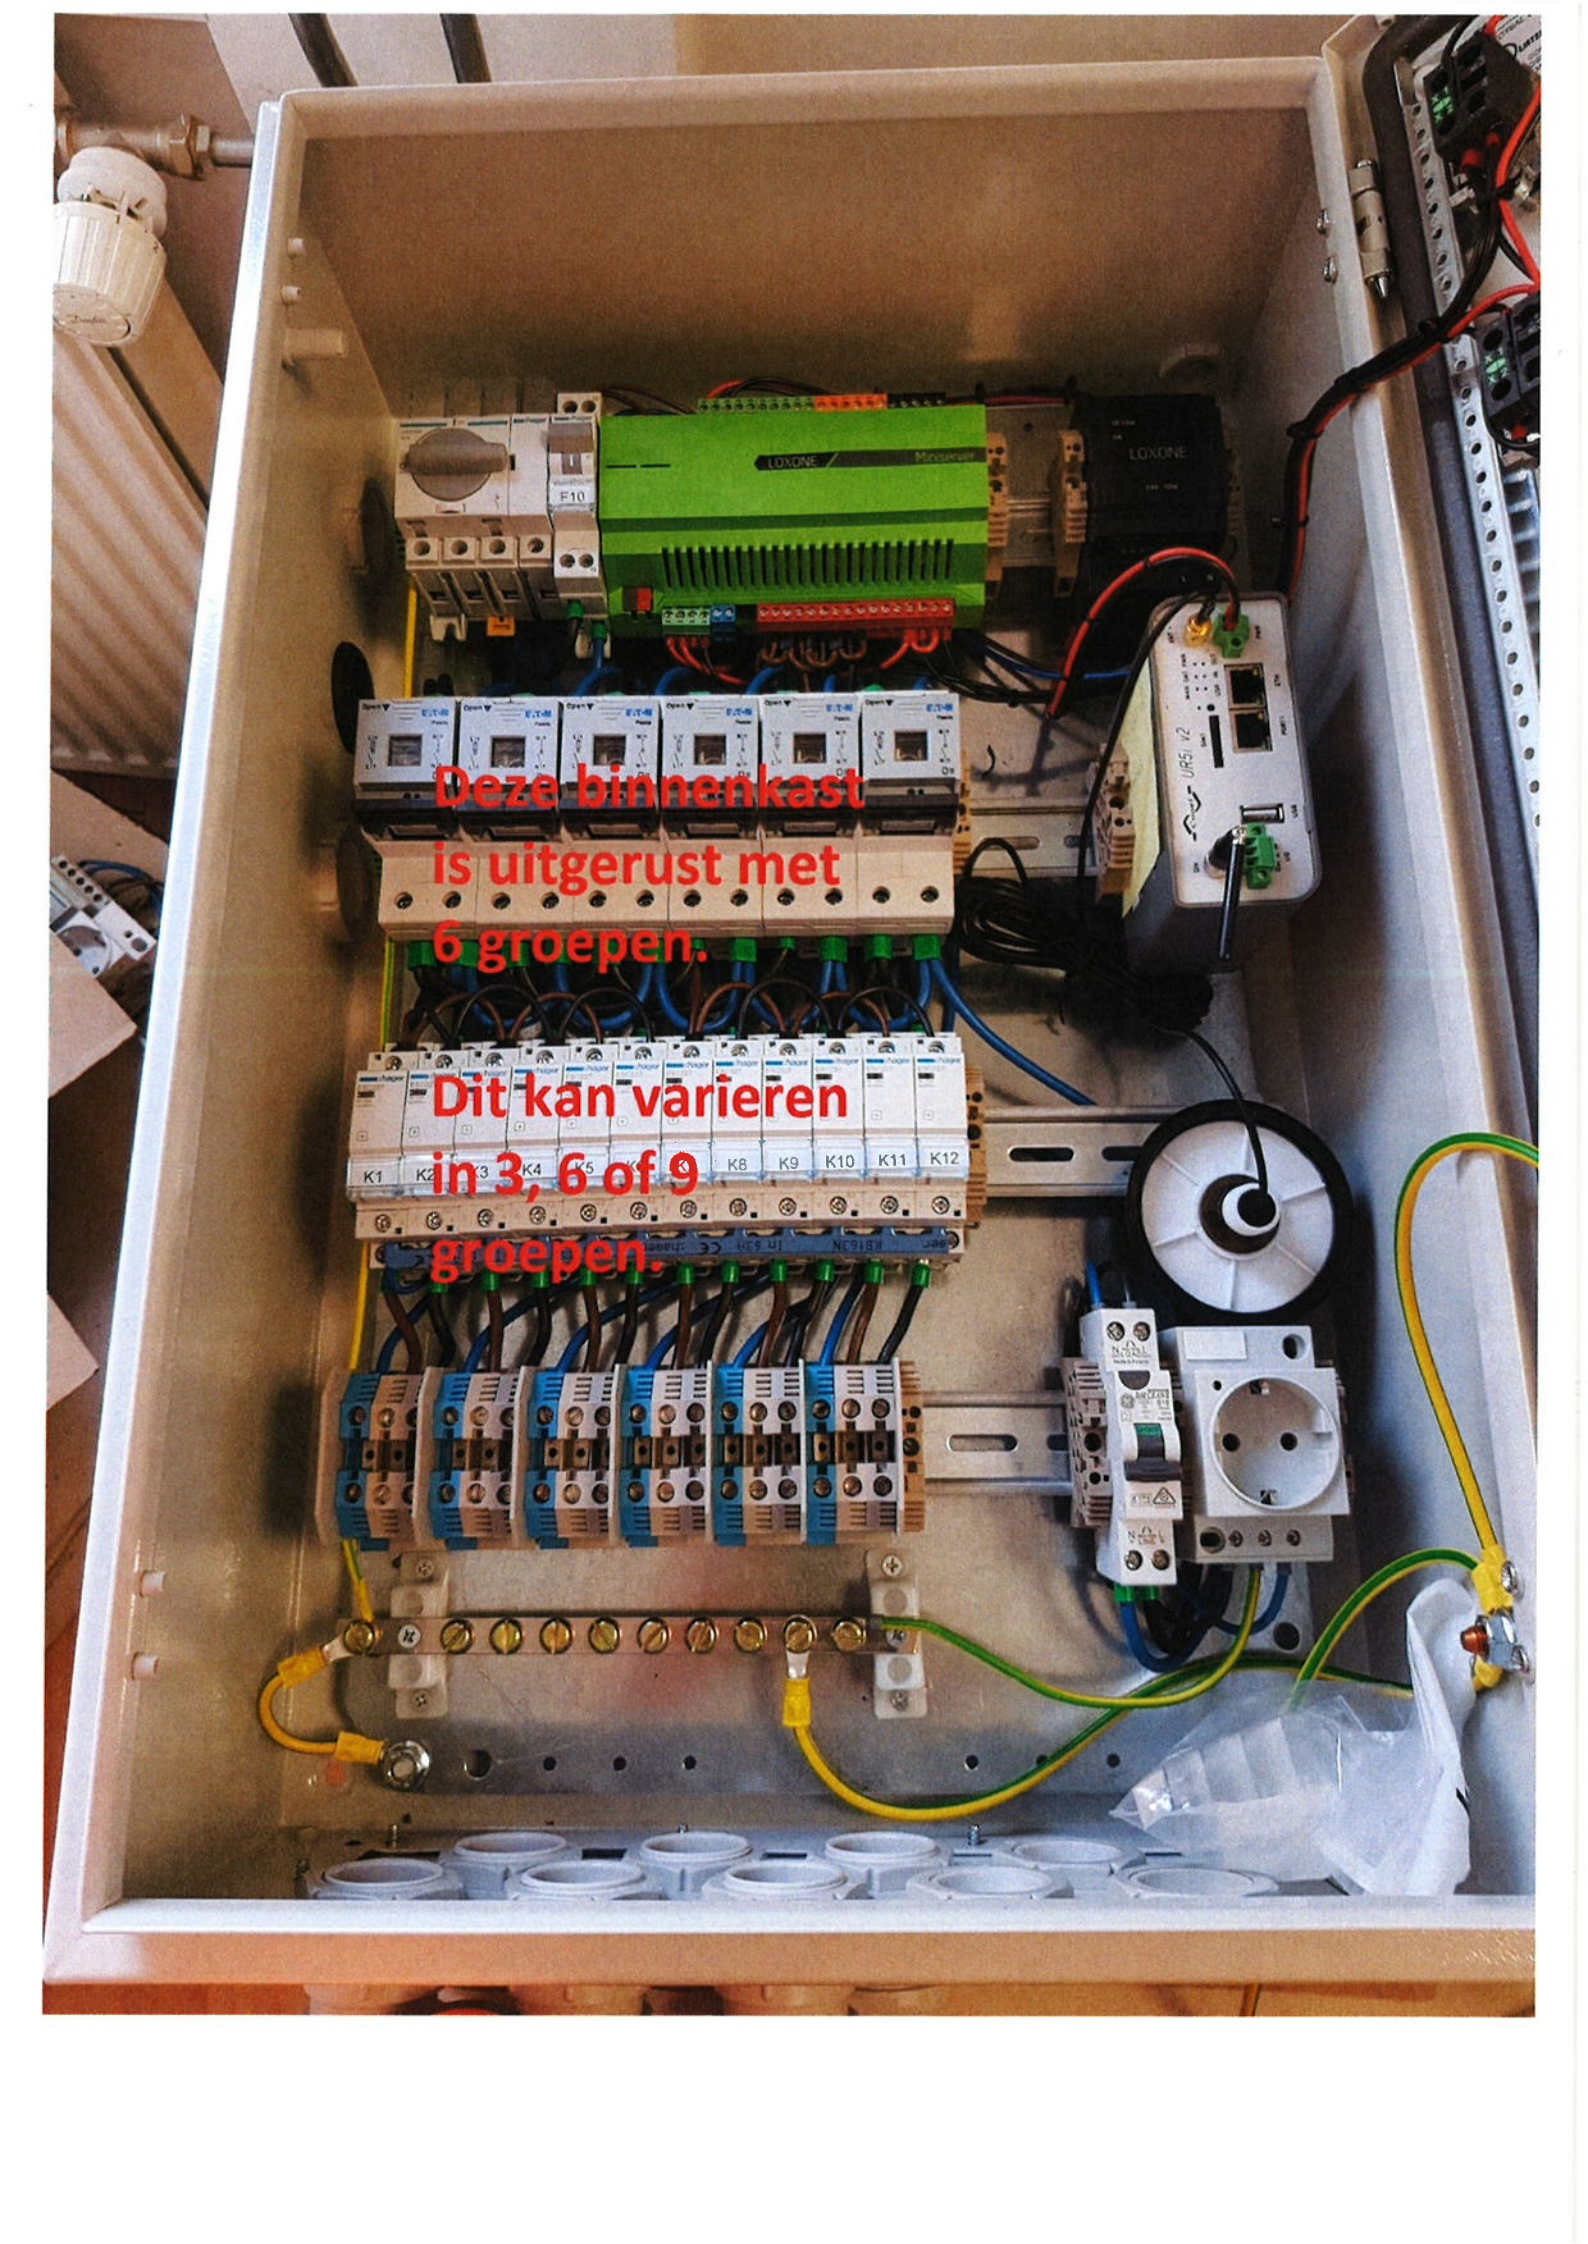

The image shows the interior of a control cabinet. At the top, there is a green Loxone Miniserver and a black Loxone power supply. Below them is a row of six white relays labeled E10 through E15. In the center, there is a terminal block with 12 positions, labeled K1 through K12. Below this, there are several blue and white terminal blocks. At the bottom, there is a row of white circular components, possibly sensors or actuators. Various colored wires (red, blue, green, yellow) are connected to the components. A white Loxone UR5i v2 module is visible on the right side. A black circular fan is also present. The cabinet is made of light-colored metal.

Deze binnenkast
is uitgerust met
6 groepen.

Dit kan variëren
in 3, 6 of 9
groepen.