



Art.no. 84450-20005

EAN 7316911400864

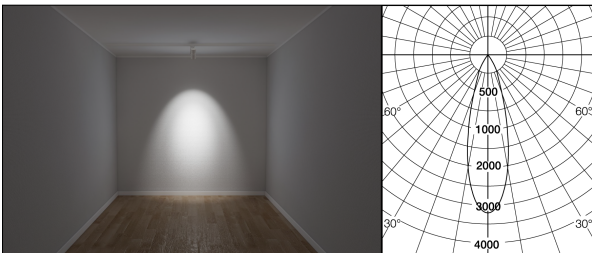

Touch is a stylish and timeless luminaire that will fit smoothly into any retail environment. Touch Mini is a small, neat and discreet spotlight with an integrated driver perfect for illuminating areas where there is a lower ceiling height such as 2,5-3m.

Installation Track mounted 3-phase track, Control Track or iTrack.

Design Housing in powder coated aluminium, white (RAL 9016), black (RAL 9017). Integrated driver.

Miscellaneous 930 LED is Below Black Body Locus (BBBL), other colour temperature on Black Body Locus.

Touch Mini G2

Medium Beam, 3-phase track, On/off, HL, segmented

DESIGN

| | |
|-----------------------------------|---------------------------------------|
| Installation 3-phase track | Light distribution Medium Beam |
| Beam angle, ° 29 | Tilt, ° 90 |
| Turn, ° 360 | Colour White |

LIGHT DATA & PERFORMANCE

| | |
|--|--|
| Lumen output 2884 | lm/W 132 |
| CCT, K 3000 BBBL | CRI 90 |
| SDCM 3 | Lumen maintenance 35 000 h L95 |
| Lumen maintenance 50 000 h L93 | Lumen maintenance 75 000 h L89 |
| Lumen maintenance 100 000 h L86 | LED driver, h/max failure % 100000/10 |
| Energy class, LED module E | |

CONTROLS & CONNECTIVITY

| | |
|-----------------------------|-------------------------------------|
| Light control On/off | Driver brand PhiOsr |
| ZD4i Certified False | Daylight functionality False |

ELECTRICITY & ENCLOSURE

| | |
|--|--|
| Rated supply voltage, V 220-240 | Mains frequency, Hz 50, 60 |
| Protective class 2 | IP rating (above suspended ceilings) 20 |
| System Wattage 22 | Min. ambient temperature, °C -20 |
| Max. ambient temperature, °C 25 | MCB B10A, pcs 20 |
| MCB B16A 30 | MCB C10A 34 |
| MCB C16A 51 | THD, % 10 |
| Surge protection CM, kV/kA 2 | Surge protection DM, kV/kA 1 |
| Power factor, 100 % 0.95 | |

DIMENSIONS

| | |
|-------------------------|------------------------|
| Length, mm 160 | Width, mm 100 |
| Height, mm 201 | Diameter, mm 85 |
| Weight, kg 0.700 | |