
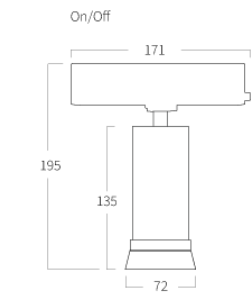


Art.no. 65244
EAN 7316911794871

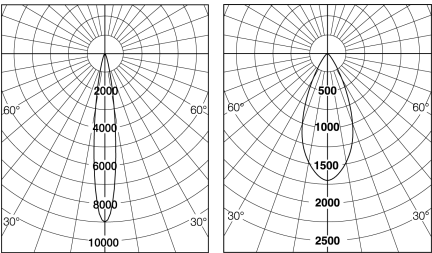

Zkye 55 G2 Zoom Spotlight is a track-mounted spotlight (Ø 55 mm) for directional light. The optics have a lens for adjustable light distribution and offer good opportunities to precisely adapt the luminaire however needed.

Installation Mounted on Lighting Track Pro 3-phase track, Control Track, or Control Track Dual (DALI).

Design Standard white (RAL 9016) or black (RAL 9005).

Light distribution Narrow beam to wide beam, with a variable setting.

Dimming On/Off, DALI, or e-Sense Stage.

Rail Lighting Track Pro, Control Track, or Control Track Dual.

Adapter The adapter locks mechanically to the rail with a knob. Phase 1, 2 or 3 can then be selected with the phase selector knob.

LED-information Intrack driver in adapter.

Zkye 55 G2 Zoom Spotlight
Wide/Narrow Beam, 3-phase track, On/off

DESIGN

Installation 3-phase track	Light distribution Wide/Narrow Beam
Beam angle, ° 15	Tilt, ° 90
Turn, ° 360	Colour White

LIGHT DATA & PERFORMANCE

Lumen output 1118	lm/W 77
CCT, K 4000	CRI 90
SDCM 3	Melanopic DER 0.660
Lumen maintenance 35 000 h L96	Lumen maintenance 50 000 h L95
Lumen maintenance 75 000 h L93	Lumen maintenance 100 000 h L91
LED driver, h/max failure % 100000/10	Energy class, LED module F

CONTROLS & CONNECTIVITY

Light control On/off	Driver brand Philips
ZD4i Certified False	Daylight functionality False

ELECTRICITY & ENCLOSURE

Rated supply voltage, V 220-240	Mains frequency, Hz 50, 60
Protective class 2	IP rating 20
System Wattage 15	Min. ambient temperature, °C -20
Max. ambient temperature, °C 25	MCB B10A, pcs 45
MCB B16A 72	MCB C10A 74
MCB C16A 122	THD, % 8
Surge protection CM, kV/kA 2	Surge protection DM, kV/kA 1
Power factor, 100 % 0.98	

DIMENSIONS

Length, mm 171	Width, mm 73
Height, mm 195	Weight, kg 0.4