

SIEMENS

Product data sheet

3RH1122-1BP40


Abb. ähnlich / similar picture

CONTACTOR RELAY, 2NO+2NC, DC 230 V,
SCREW CONNECTION, SIZE S00

General details:

Size of the contactor S00

Control circuit:

Type of voltage DC

Control supply voltage

for DC / rated value / minimum 230 V

for DC / rated value / maximum 230 V

Main circuit:

Operating current
at AC-14 / at AC-15 / at 230 V / rated value 6 A

Auxiliary circuit:

Identification number and letter for switching elements 22 E

Number of NO contacts / for auxiliary contact 2

delayed switching 0

asynchronous switching 0

Number of NC contacts / for auxiliary contact 2

delayed switching 0

asynchronous switching 0

Number of change-over switches / for auxiliary contact 0

Connection type:

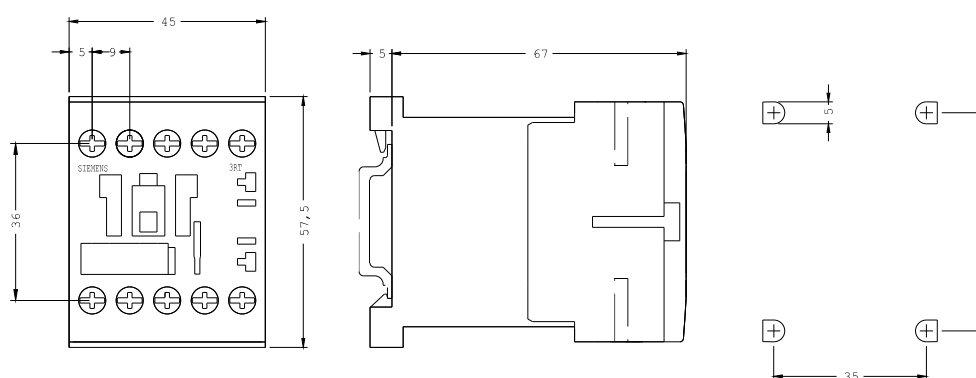
Design of the electrical connection / for auxiliary and control current circuit

screw-type terminals

Mechanical design:

Type of fixing/fixation

screw and snap-on mounting

**last change:**

10/31/2006

Technical Assistance:

Telephone: +49 (0) 911-895-5900 (8°° - 17°° CET)

Fax: +49 (0) 911-895-5907

E-Mail: technical-assistance@siemens.comInternet: www.siemens.de/lowvoltage/technical-assistance