Quotation

7-9-2020 **Quote No.: Q1729-1**

Attn:		**Project:**	**Gortmolenerf-Solingenstraat-Lethmaetstraat**		
Customer:	Gemeente Gouda	**Phone:**			
Address:	Postbus 1086	**Fax:**		**Project Contact:**	
City/State:	Gouda, x 2800 BB	**E-mail:**		**Phone / Fax:**	

Area No. 1 of 3 - Gortmolenerf (x)

Installation Site:	x	**Ship To:**	x	**Quote Type:**	DuraSAFE Material Only
Address:		**Address:**		**Sub Base Type:**	Concrete (cured 10 days)
City/State:	Gouda, x	**City/State:**	Gouda, x	**Area (sq m):**	60,29

Unit	Quantity	Color	Description	Thickness	Drop Height	Weight	List Price	Total Weight	Total List	Unit Cost
Each	166	Blue (90%)	DuraSAFE "Premium"	5,08 cm	0 m 91,4400 cm	11,34	€ 24,90	1.882,41		
Each	21		Adhesive - Tile to Tile - Sika			0,75	€ 8,50	15,72		
Each	6		DOW Diamondlock Adhesive - Tile to Base			28,12	€ 105,00	168,72		
Each	1		Installation Manual			0,21	€ 0,00	0,21		
Each	10		Polyurethane Foam Sealant (Handi Foam)			0,53	€ 0,00	5,31		
							Sub Total (Material Only):			

Area No. 2 of 3 - Solingenstraat (x)

Installation Site:	x	**Ship To:**	x	**Quote Type:**	DuraSAFE Material Only
Address:		**Address:**		**Sub Base Type:**	Concrete (cured 10 days)
City/State:	Gouda, x	**City/State:**	Gouda, x	**Area (sq m):**	64,29

Unit	Quantity	Color	Description	Thickness	Drop Height	Weight	List Price	Total Weight	Total List	Unit Cost
Each	38	Blue (90%)	DuraSAFE "Premium"	5,08 cm	0 m 91,4400 cm	11,34	€ 24,90	430,91		
Each	66	Brt.Green (90%)	DuraSAFE "Premium"	5,08 cm	0 m 91,4400 cm	10,96	€ 24,90	723,58		
Each	74	Terra Cotta (90%)	DuraSAFE "Premium"	5,08 cm	0 m 91,4400 cm	11,09	€ 24,90	821,02		
Each	22		Adhesive - Tile to Tile - Sika			0,75	€ 8,50	16,47		
							Sub Total (Material Only):			

Area No. 3 of 3 - Lethmaetstraat (x)


Installation Site:	x	**Ship To:**	x	**Quote Type:**	DuraSAFE Material Only
Address:		**Address:**		**Sub Base Type:**	Concrete (cured 10 days)
City/State:	Gouda, x	**City/State:**	Gouda, x	**Area (sq m):**	72,84

Unit	Quantity	Color	Description	Thickness	Drop Height	Weight	List Price	Total Weight	Total List	Unit Cost
Each	200	90% Color	DuraSAFE "Premium"	8,26 cm	1 m 82,8800 cm	14,29	€ 27,17	2.857,63		
Each	25		Adhesive - Tile to Tile - Sika			0,75	€ 8,50	18,71		

h an evaluation version of the Amvuni(r) PDF Converter - http://www.amvuni.com

Tile Layout - Area No. 1 - Gortmolenerf (x)

Area (sq m): 60,29

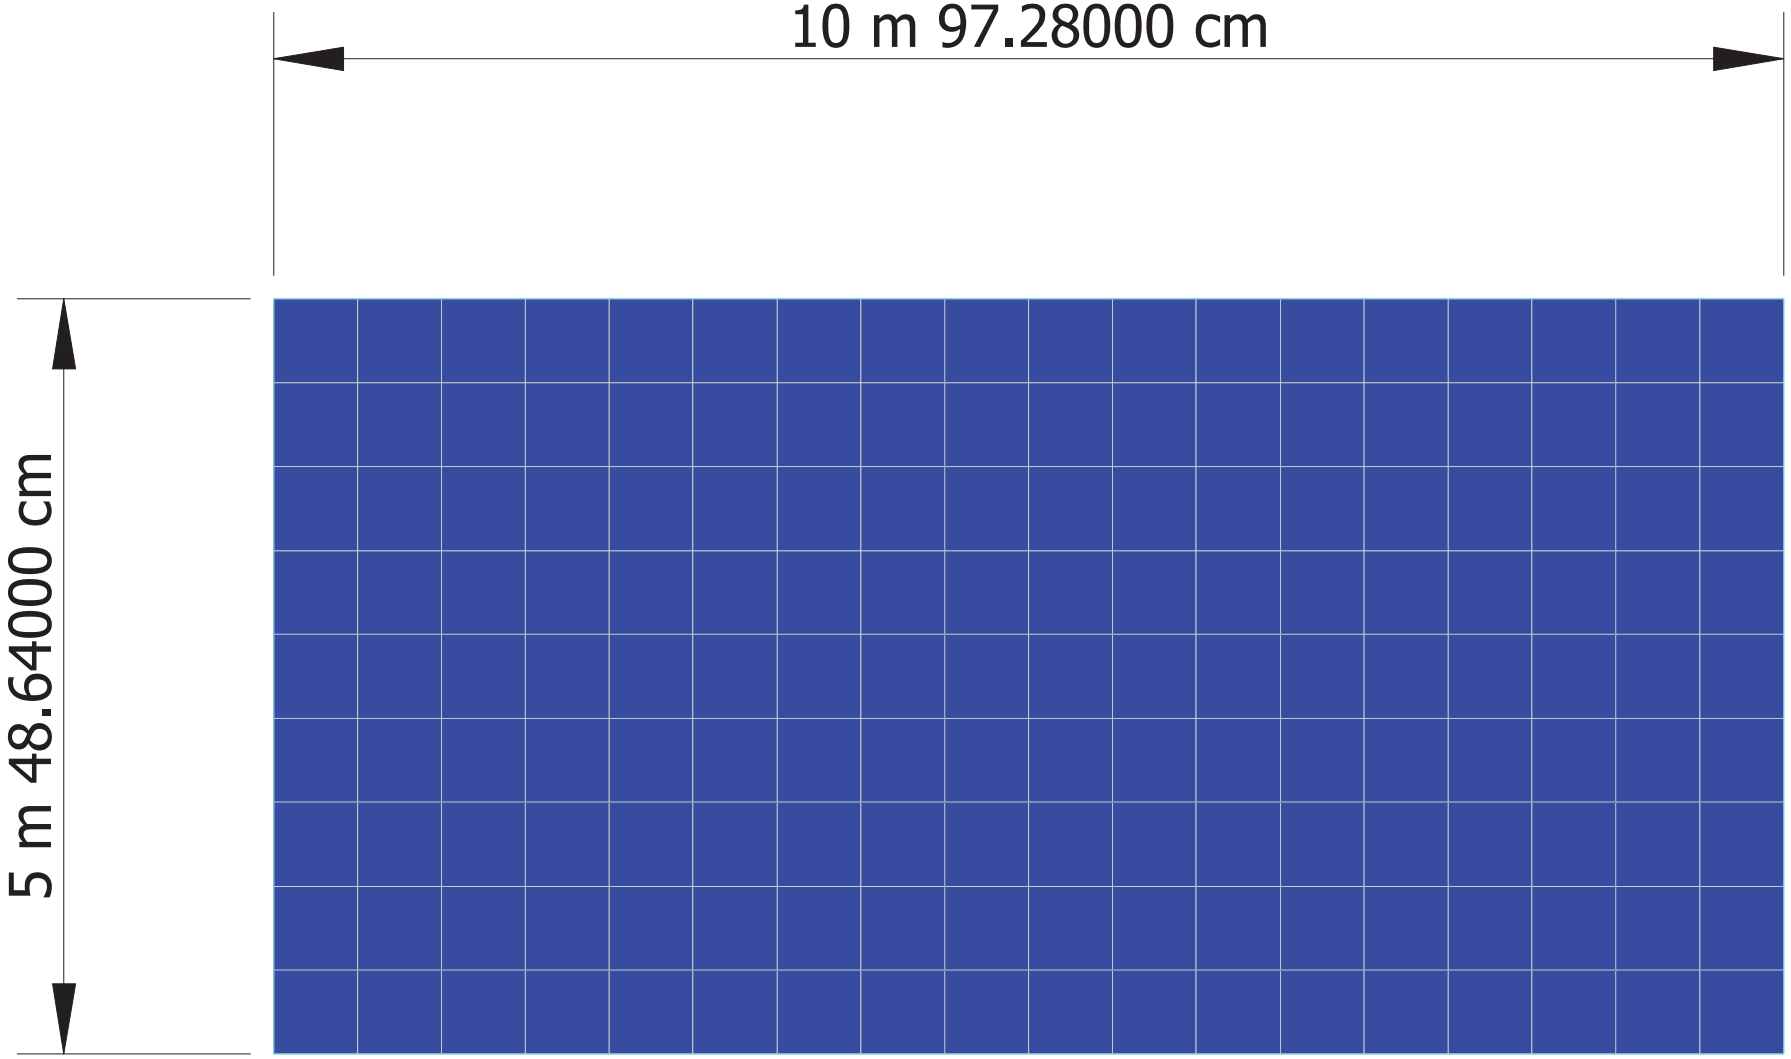


X _____ The material quantities proposed are based on this layout. If the layout is altered, this may influence the quantities needed for a successful installation. Please initial that you understand and agree.

h an evaluation version of the Amyuni(r) PDF Converter - http://www.amyuni.com

Tile Layout - Area No. 2 - Solingenstraat (x)

Area (sq m): 64,29

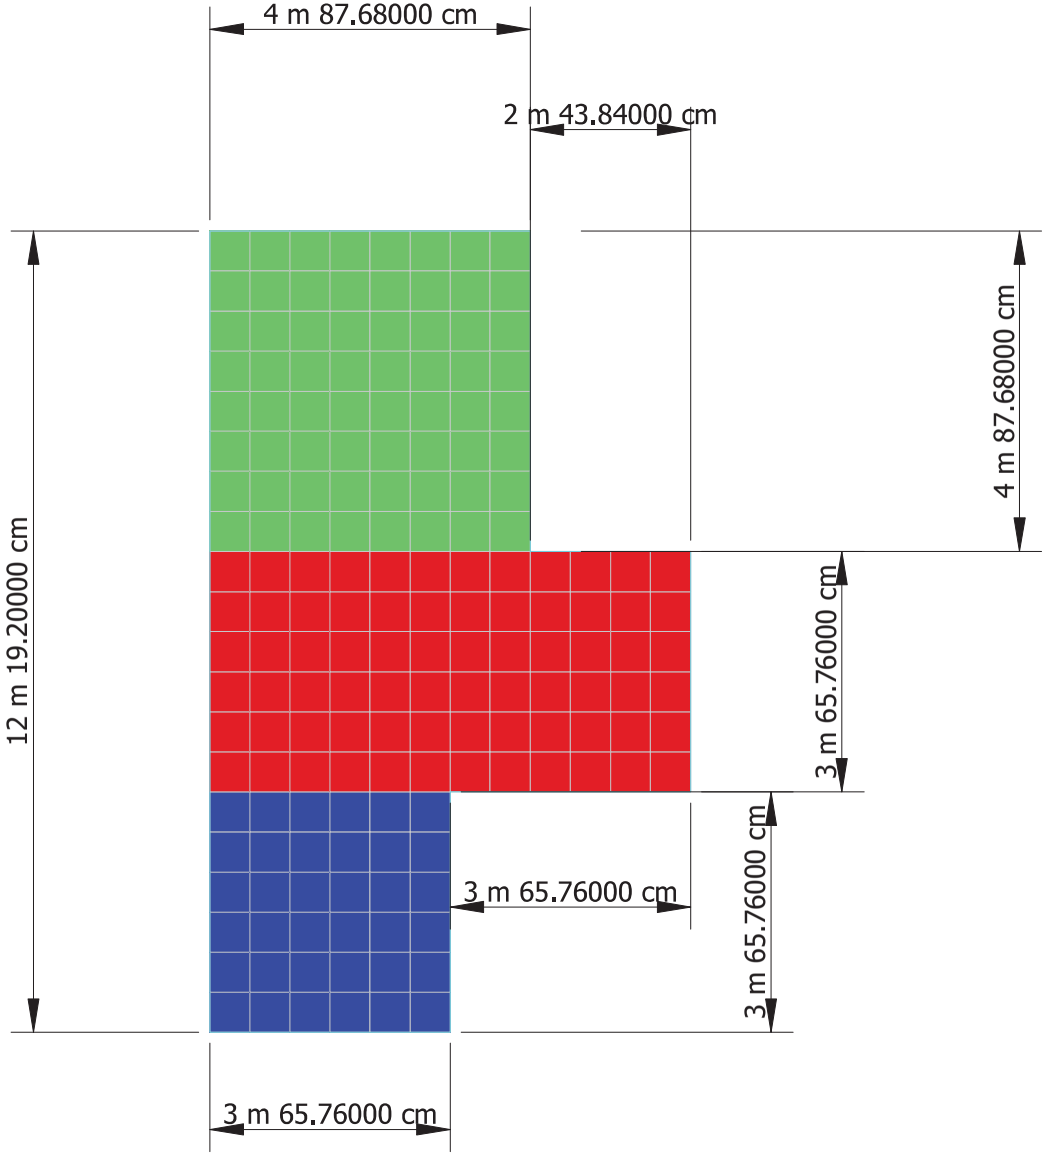


X The material quantities proposed are based on this layout. If the layout is altered, this may influence the quantities needed for a successful installation. Please initial that you understand and agree.

h an evaluation version of the Amyuni(r) PDF Converter - http://www.amyuni.com

Tile Layout - Area No. 3 - Lethmaetstraat (x)

Area (sq m): 72,84

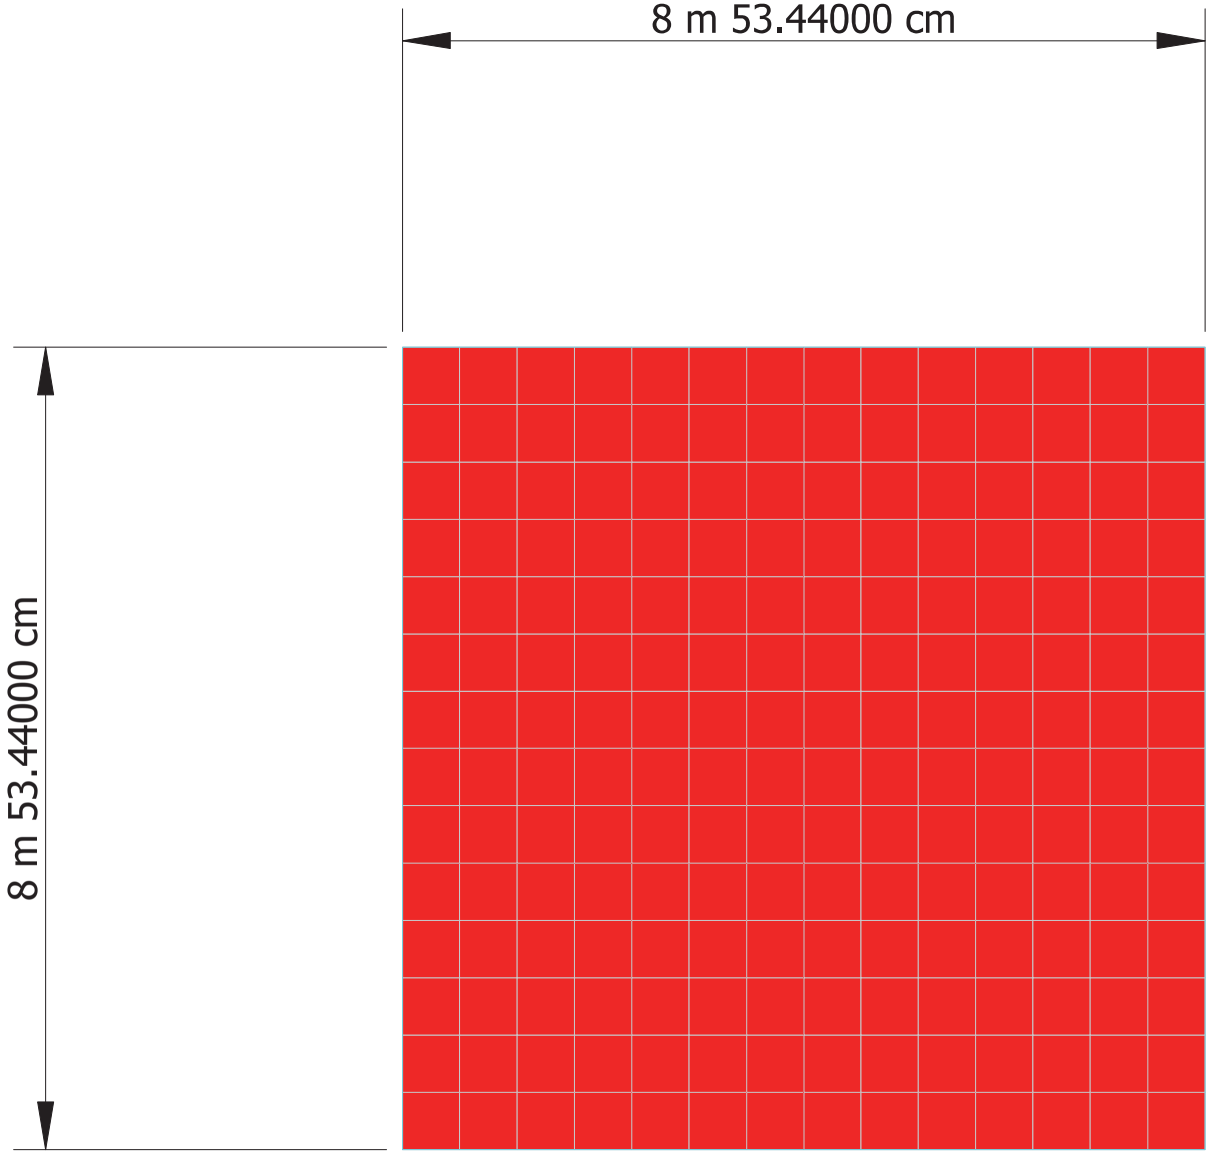

X _____ The material quantities proposed are based on this layout. If the layout is altered, this may influence the quantities needed for a successful installation. Please initial that you understand and agree.

h an evaluation version of the Amyuni(r) PDF Converter - http://www.amyuni.com

Pallets: 10 Weight: 7.326,42

Shipping Options: Need Van, Residential Delivery

duraSAFE® Rubber Playground Tiles were engineered with the use of tile to tile adhesive as part of the installation process. As a result, the duraSAFE warranty revolves around the mandatory use of adhesive for all outdoor projects. Projects which are installed in a manner other than those outlined in sofSURFACES' duraSAFE Installation Procedures will void the full duraSAFE Warranty. SSI wishes to remind you that our Quotation Department has been established for the purpose of assisting you in providing your client with as accurate a quotation as possible. We must emphasize however, that our function is that of assisting. The final responsibility of determining the exact material requirements, rests with you, our dealer. Therefore, please check all measurements, calculations and prices for accuracy and to ensure they align with your clients understanding of the project. Please note that appropriate equipment (ie: forklift and/or manpower, pallet jack and chain if necessary), will be required at delivery site.

15% Restock fee and shipping for plus tiles. No returns on premium tiles.

The drawings within this quote are based on measurements supplied to sofSURFACES and are not professional engineered drawings. It is the project manager's responsibility (not sofSURFACES or its dealer) to provide sofSURFACES with correct measurements and to ensure that all site specifications and site preparations (including without limitation slopes, ramps, and transition components) are compliant with local building codes, and prepared to sofSURFACES' requirements.

Total List Price:		
Total:		
Shipping and Handling Charge:		
Sub Total:		
VATNL:	21,00%	
Total in EUR Funds:		
Cost per sq m:		

Created with an evaluation version of the Amyuni(r) PDF Converter - http://www.amyuni.com